



**Vehicle
Service**Tools



The Ultimate Power Tools



Our Business

A global operation that puts power into the hands of the automotive professional. Founded in 1901, Chicago Pneumatic is a global leader in the manufacture of a wide range of automotive power tools offering unrivaled quality and advanced technology that stems from pioneering innovation, tireless research and inspired design and development.

Our Strengths

The total integration of multi-cultural engineering experience, quality driven manufacturing expertise and customer-oriented service. International centres of excellence in application research, product development, manufacture and sales support that serve the needs of our customers worldwide.

Our Mission

To exceed customer expectations in every aspect of quality, performance and value. The corporate goal: total dedication to meeting customer needs by offering the ultimate power tool solutions that combine top quality, high productivity, and the best value for your money. The CP brand: the ultimate in power tool performance and quality.

Headquartered in
Rock Hill, SC,
Chicago Pneumatic
serves the needs of
customers worldwide.



Contents

2	General Safety	34	Air Hammers
6	Air Impact Wrenches	37	Air Screwdrivers
14	Cordless Impact Wrenches	39	Air Riveters
16	Air Ratchets	41	Accessories
19	Air Finishing	48	Repair Centres
25	Air Cutting Tools & Grinders	53	Warranty Information
31	Air Drills		

Numerical Tool Index

TOOL	DESCRIPTION	PAGE	TOOL	DESCRIPTION	PAGE	TOOL	DESCRIPTION	PAGE
CP5000	Air Impact Wrenches	13	CP7733	Air Impact Wrenches	8	CP835	Cutters & Misc Tools	30
CP710	Cutters & Misc Tools	30	CP7733-2	Air Impact Wrenches	8	CP854	Grinders	28
CP711	Air Hammers	35	CP7750	Air Impact Wrenches	9	CP854E	Grinders	28
CP7110	Air Hammers	35	CP7750-2	Air Impact Wrenches	9	CP856	Grinders	27
CP7120	Air Hammers	36	CP776	Air Impact Wrenches	10	CP857	Grinders	28
CP714	Air Hammers	35	CP776-6	Air Impact Wrenches	10	CP858	Air Finishing Tools	24
CP715	Air Hammers	35	CP777	Air Finishing Tools	23	CP860	Grinders	27
CP716	Air Hammers	36	CP7775	Air Impact Wrenches	13	CP860ES	Grinders	27
CP717	Air Hammers	36	CP7775-6	Air Impact Wrenches	13	CP861	Cutters & Misc Tools	30
CP719	Air Impact Wrenches	7	CP778	Air Finishing Tools	20	CP862	Grinders	28
CP719QC	Air Impact Wrenches	7	CP780	Air Screwdrivers	38	CP863	Grinders	28
CP7200S	Air Finishing Tools	20	CP781	Air Screwdrivers	38	CP864	Air Finishing Tools	22
CP7201P	Air Finishing Tools	20	CP782	Air Screwdrivers	38	CP865P	Air Finishing Tools	24
CP7202D	Air Finishing Tools	20	CP783	Air Screwdrivers	38	CP865S	Air Finishing Tools	23
CP721	Air Impact Wrenches	7	CP7830	Air Ratchets	18	CP869P	Air Finishing Tools	24
CP722	Air Impact Wrenches	7	CP7830HQ	Air Ratchets	18	CP869S	Air Finishing Tools	23
CP7220	Air Finishing Tools	21	CP7830Q	Air Ratchets	18	CP870	Air Finishing Tools	22
CP724H	Air Impact Wrenches	7	CP784	Air Drills	32	CP871	Tyre Buffer	29
CP7250	Air Finishing Tools	21	CP785	Air Drills	32	CP872	Grinders	28
CP726H	Air Impact Wrenches	8	CP785H	Air Drills	33	CP873	Tyre Buffer	29
CP727	Air Impact Wrenches	7	CP785QC	Air Drills	32	CP8730	C&E Impact Wrenches	15
CP7300	Air Drills	32	CP785S	Cutters & Misc Tools	30	CP8730E	C&E Impact Wrenches	15
CP7300R	CQ Air Drills	32	CP789HR	Air Drills	33	CP874	Cutters & Misc Tools	30
CP7300R	Air Drills	32	CP789R-26	Air Drills	33	CP8740E	C&E Impact Wrenches	15
CP7301	Air Drills	32	CP789R-42	Air Drills	33	CP8745E	C&E Impact Wrenches	15
CP7302	Air Drills	32	CP7900	Reciprocating Saws	26	CP875	Grinders	27
CP734H	Air Impact Wrenches	8	CP7901	Reciprocating Saws	26	CP876	Grinders	27
CP734HK	Air Impact Wrenches	8	CP796	Air Impact Wrenches	11	CP879	Air Drills	33
CP746	Air Impact Wrenches	8	CP796SP	Air Impact Wrenches	11	CP881	Reciprocating Saws	26
CP746-2	Air Impact Wrenches	8	CP797	Air Impact Wrenches	12	CP883	Air Riveters	40
CP749	Air Impact Wrenches	9	CP797-6	Air Impact Wrenches	12	CP884	Air Riveters	40
CP749-2	Air Impact Wrenches	9	CP797SP-6	Air Impact Wrenches	12	CP886	Air Ratchets	17
CP760	Air Finishing Tools	22	CP797TL-6	Air Impact Wrenches	12	CP886H	Air Ratchets	17
CP761	Air Finishing Tools	22	CP797TLSP-6	Air Impact Wrenches	12	CP887	Air Drills	33
CP763	Air Finishing Tools	22	CP8210	Air Finishing Tools	24	CP893	Air Impact Wrenches	11
CP766	Air Finishing Tools	21	CP824	Air Ratchets	17	CP893-6	Air Impact Wrenches	11
CP768	Air Finishing Tools	23	CP824T	Air Ratchets	17	CP894	Air Impact Wrenches	11
CP770	Air Impact Wrenches	10	CP825	Air Ratchets	17	CP897	Air Impact Wrenches	13
CP770-6	Air Impact Wrenches	10	CP825T	Air Ratchets	17	CP897-6	Air Impact Wrenches	13
CP771	Air Impact Wrenches	11	CP826	Air Ratchets	17	CP897SP-6	Air Impact Wrenches	13
CP771-6	Air Impact Wrenches	11	CP826T	Air Ratchets	17	CP898	Air Impact Wrenches	13
CP772H	Air Impact Wrenches	10	CP828	Air Ratchets	18	CP898-6	Air Impact Wrenches	13
CP772H-6	Air Impact Wrenches	10	CP828H	Air Ratchets	18			



CP Team Truck

Look for the new, fully equipped CP Truck. Showcasing CP's full range of product to distributors, jobbers and end-users throughout the United States.

General Safety Instructions for the Operation of Power Tools

The goal of Chicago Pneumatic is to produce tools that help the operator work safely and efficiently. The most important safety device for this or any tool is the operator. Care and good judgement are the best protection against injury. All possible hazards cannot be covered here, but we have tried to highlight some of the important ones. Individuals should look for and obey Caution, Warning and Danger Signs placed on tools, and displayed in the workplace. Operators should read and follow safety instructions packed with each tool. For a copy of these instructions, contact Chicago Pneumatic Customer Service in the USA and Canada at (800) 624-4735 or contact your nearest Chicago Pneumatic representative.

Learn how each tool works. Even if you have previously used similar tools, carefully check out each tool before you use it. Get the “feel” of it and know capabilities, limitations, potential hazards, how it operates and how it stops.



WARNING

Multiple Hazards. Read and understand safety instructions supplied with tool before operating or servicing. Failure to do so can result in serious bodily injury.

Sound values $\pm 3\text{dB(A)}$ * measured in accordance with EN ISO15744 (A), 8NTC1.2 (B) or ISO 15744 (C) and Vibration values* measured in accordance with ISO8662 as follows: (D) Part 1; (E) Part 7; (F) Part 8; (G) Part 2; (H) Part 12; (J) Part 10.

*These declared values were obtained by laboratory testing in compliance with stated standards and are not adequate for use in risk assessments. Values measured in individual work places may be higher than the declared values. The actual exposure values and risk of harm experienced by an individual are unique and depend upon the way the user works, the workplace and the work station design, as well as upon the exposure time and the physical condition of the user. We, Chicago Pneumatic, cannot be held liable for the consequences of using declared values, instead of values reflecting the actual exposure, in an individual risk assessment in a work place situation over which we have no control.

Compressed Air Hazards

- Air under pressure can cause injury. Never point an air hose at yourself or anyone else. Never blow your clothes free of dust with compressed air. Always direct exhaust air away from yourself and others in the work area.
- Always check for damaged or loose hoses and fittings before using an air tool, and replace if necessary. Whipping hoses can cause serious injury.
- Disconnect the tool from the air supply when not in use, before changing accessories, setting the torque, or when making repairs.
- Do not exceed rated air pressure to increase the output of the tool. This could cause injury and shorten tool life.
- Do not assemble quick coupler on the tool. Vibration can cause breakage resulting in a whipping air hose. Instead, use quick couplers on the end of a short leader hose.
- When universal twist couplings are used, lock pins must be installed to prevent accidental hose disconnection.
- Air tools are not intended for use in explosive atmospheres and are not insulated for contact with electric power sources.

Projectile Hazards of CP air tools

Always wear impact resistant eye and face protection when involved with or near the operation or repair of air tools.

Breathing Hazards

Proper breathing protection must be worn when working with materials which produce airborne particles.

Noise Hazards

Hearing loss can result from prolonged exposure to excessive sound levels.

Use hearing protection as recommended by your employer or OSHA regulation (see 29 CFR part 1910).

Vibration Hazards

Repetitive work motions, awkward positions and exposure to vibration may be harmful to your hands and arms.

If numbness, tingling, pain or whitening of the skin occurs, stop using tool and consult a physician.

Entanglement Hazards

To reduce the risk of injury from entanglement, do not wear loose clothing when using rotating accessories.

Additional Hazards

- Slip/Trip/Fall is a major cause of serious injury or death. Beware of excess hose/cord left on the walking or work surface.
- Operators and maintenance personnel must be physically fit to perform job tasks, and handle the bulk, weight and power of the tool.
- Deburring tools should be used to reduce risk of cuts and abrasions due to burrs.
- Wear gloves to protect hands from sharp edges.

Specific Safety Instructions for Power Tool Groups

In addition to the General Safety Instructions, the following are safety instructions and warnings that apply to the safe operation of specific power tool groups. Consult ANSI B186.1 Safety Code for Portable Air Tools. Available from: America National Standards Institute (ANSI), 11 W. 42nd St., 13th floor, New York, New York 10036, (212) 642-4900; or the European Committee for Standardization, Rue de Stassart 36, 1050 Brussels, Belgium.

Impact Wrenches



- Never use hand sockets. Use only impact sockets in good condition. Sockets in poor condition reduce impact power and could also shatter, resulting in personal injury.
- When using a universal joint, never operate the tool off the work. It may run too fast and cause the joint to be thrown from the tool.
- Always use the simplest hook-up possible. Long springy extension bars and adapters absorb impact power and could break loose resulting in personal injury. Instead, use deep sockets whenever possible.
- For tools using the pin and o-ring socket retainer, use the o-ring to securely retain the socket pin.

Assembly Tools

Serious injury can result from over-torqued or under-torqued fasteners, which can break, or loosen and separate. Released assemblies can become projectiles. Assemblies requiring a specific torque must be checked using a torque meter.

Note: So-called "click" torque wrenches do not check for potentially dangerous over-torqued conditions.

Abrasive Tools



- Never mount a grinding wheel on a sander.
- Never use a grinding wheel marked with a speed lower than the air grinder speed.
- All grinding wheels and polishing/sanding accessories should be checked for cracks or other damage before mounting and use.
- Always use the recommended wheel guard to prevent injury when performing grinding operations. If a guard has withstood wheel or disc breakage, it must be replaced.
- Position a guard between the grinding wheel or disc and the operator. Use barriers to protect others from fragments and grinding sparks.
- Make sure grinding wheels are mounted according to manufacturer's specifications; always use correct mounting flanges.
- Before grinding, test grinding wheel or disc by briefly running tool at full throttle. Be sure to use a barrier (such as under a heavy work table) to protect yourself from possible broken wheel parts.
- Never tamper with or remove a speed governor from a tool to make it run faster. Periodically check tool speed with a tachometer.

Ratchets



- Never use hand sockets. Use only power drive sockets per ANSI B107.2.
- To reduce the risk of injury, always support the handle securely in the direction opposite of the spindle rotation to minimize torque reaction.

Hammers



- All chisels, rivet sets and other accessories should be checked for cracks, excessive wear, or other physical damage before each use. Accessories that show signs of damage should be replaced immediately.
- Never use a tool without the proper accessory retainer.

Drills



- Keep away from rotating bit and chuck. You can become cut or burned if you come in contact with the drill bit, chips or work surface.
- Use intermittent drill pressure to avoid long shaved chips.
- The drill bit can suddenly bind and cause the work piece or tool to rotate causing arm and shoulder injuries.
- ANSI recommends use of a support handle on drills with a chuck larger than 3/8" (10 mm).

See Safety Requirements for Abrading Materials with Coated Abrasives (B7.7) from ANSI.

Specialty Tools - Screwdrivers




- Specific instructions/warnings affecting this group of tools are contained in product-specific documents accompanying each product.

Accessories



- Always use accessories of correct size and design for the tool. Tool and accessories must not be modified in any way.
- Never use a tool without the proper accessory retainer.





Our tools have a job to do,
just like you.



You can't slow down for a tool that doesn't keep up. Chicago Pneumatic tools are made for serious work, to help you get the job done. Tools that are tough, powerful and dependable, so you can work faster and more efficiently. Your productivity is our bottom line.

We have extended our product line with tools that continue to prove our commitment to innovation and meet the tough demands of the automotive professional.

More torque, higher speeds, reduced vibration, less weight, greater control and maximum flexibility. All built to last. Tools made in the Chicago Pneumatic tradition since 1901.



Air Impact Wrenches

We know a good impact can be the most important tool in the shop, so we've worked hard to offer you the most. The most innovation resulting in the patented CP Turbo motor system and patented clutch mechanisms like our latest, the **SpringHammer**, providing smooth operation and extreme durability. The most versatility by offering a wide selection for every type of application. All with power, speed and comfort. Finally, your toughest jobs have met their match.



CP719 1/4" Heavy Duty Air Impact Wrench



- Fast, with 47Nm of torque at 7,000 rpms
- Compact and lightweight for easy access to the tight spots. Only 115mm long at 1.13kg
- One hand push button forward/reverse power regulator
- Perfect for small engine repair, small fasteners and body shops
- **Ultimate Torque: 47Nm**

CP719QC 1/4" Heavy Duty Hex Air Impact Wrench



- Same great features as the CP719 plus a 1/4" hex chuck
- **Ultimate Torque: 47Nm**

CP721 3/8" Heavy Duty Air Impact Wrench



- Rocking dog clutch for smooth operation and extreme durability
- Energy efficient motor for maximum performance
- Great tool for small engine repair, bench work and transmissions
- **Ultimate Torque: 102Nm**

CP722 3/8" Heavy Duty Air Impact Wrench



- Rocking dog clutch for smooth operation and extreme durability
- Easy manoeuvring with 360° air inlet swivel
- Butterfly throttle for comfort and control
- Packed with plenty of power for bench work, carburetors, ignitions, body panels, transmissions, oil pans, and small engine repair
- **Ultimate Torque: 102Nm**

CP724H 3/8" Heavy Duty Air Impact Wrench



- DYNA-PACT oil bath clutch delivers smooth operation and extended durability
- One hand push button forward/reverse power regulator. 4 positive power settings. Full power in reverse
- Handle exhaust directs air away from the work area while 360° air inlet swivel prevents hose kinks
- Power and economy for general repair, transmission work, exhaust systems and body shops
- **Ultimate Torque: 271Nm**

CP727 3/8" Heavy Duty Air Impact Wrench



- Durable clutch mechanism for smooth operation and longer life
- Comfortable ergonomic handle design
- Handle exhaust with 360° air inlet swivel to prevent hose kinks
- Ideal for transmission work, exhaust system, body shops and general repair in the 3/8" range
- **Ultimate Torque: 244Nm**

	CP719	CP719QC	CP721	CP722	CP724H	CP727
Square Drive [in.]	1/4	1/4 hex	3/8	3/8	3/8	3/8
Working Torque Range [Nm (ft.lbs)]	7-27 (5-20)	7-27 (5-20)	7-68 (5-50)	7-68 (5-50)	54-230 (40-170)	54-230 (40-150)
Max. Torque@90PSI Rev. [Nm (ft.lbs)]	47 (30)	47 (30)	102 (75)	102 (75)	271 (200)	244 (180)
Free Speed [rpm]	7,000	7,000	11,000	9,500	8,500	6,800
Weight [kg (lb.)]	1.13 (2.5)	1.13 (2.5)	1.19 (2.63)	0.9 (2)	1.41 (3.1)	1.59 (3.5)
Length [mm (in.)]	114 (4.5)	114 (4.5)	146 (5.75)	146 (5.75)	152 (6)	152 (6)
Avg. Air Consumption [l/min. (CFM)]	57 (2)	57 (2)	71 (2.5)	71 (2.25)	85 (3)	85 (3)
Air Inlet Thread Size NPTF [in.]	1/4	1/4	1/4	1/4	1/4	1/4
Sound dB(A) Pressure	87.6	87.6	84.1	86.3	94	95
Vibration m/s ²	<2.5	<2.5	4.9	<2.5	<2.5	4.7

Listed specifications are for reference only. Please check documents in each tool.

See page 02 for specific test methods



AIR IMPACT WRENCHES

CP726H 1/2" Heavy Duty Air Impact Wrench



- DYNA-PACT oil bath clutch delivers smooth operation and extended durability
- One hand push button forward/reverse power regulator. 4 positive power settings. Full power in reverse
- Handle exhaust with 360° air inlet swivel to prevent hose kinks
- Great tool for transmission work, exhaust systems, bench work, body shops and general repair
- **Ultimate Torque: 271Nm**

CP734H 1/2" Super Duty Air Impact Wrench



- DYNA-PACT oil bath clutch delivers smooth operation and extended durability
- One hand push button forward/reverse power regulator. 4 positive power settings. Ultimate power in reverse
- Handle exhaust with 360° air inlet swivel to prevent hose kinks
- Power and economy for general repair, transmission work, exhaust systems and body shops
- **Ultimate Torque: 576Nm**

CP734HK-Metric

1/2" Air Impact Wrench Kit

- Packed in a heavy duty carrying case, this kit includes the CP734H impact wrench plus a set of 5 sockets: 14, 16, 17, 19 & 22mm
- **Ultimate Torque: 576Nm**

CP734HK

1/2" Air Impact Wrench Kit

Same great features as the CP734HK with 1/2", 5/8", 3/4", 7/8" & 15/16" sockets



CP7733 1/2" Heavy Duty Air Impact Wrench



- Patented **SpringHammer** clutch provides smooth operation and extreme durability
- Comfort and control with new ergonomic grip and trigger
- Low air consumption and high torque makes this tool the most efficient in its class
- Packed with power and speed, this economical 1/2" impact wrench is the right tool for general automotive service, body shop, farm and light truck work.
- **Ultimate Torque: 746Nm**

CP7733-2

1/2" Heavy Duty Air Impact Wrench

Same great features as the CP7733 with a 2" extended anvil for tyre work

- **Ultimate Torque: 746Nm**



CP746 1/2" Heavy Duty Air Impact Wrench



- DynaPact oil bath clutch for smooth operation and durability
- High performance motor maximizes power output while minimizing air consumption
- One hand push button forward/reverse power regulator. Four positive power settings in forward. Ultimate power in reverse
- Power and smoothness for suspension, frame and engine work
- **Ultimate Torque: 610Nm**

CP746-2

1/2" Heavy Duty Air Impact Wrench

Same great features as the CP746 with a 2" extended anvil for tyre work

- **Ultimate Torque: 610Nm**



	CP726H	CP734H	CP7733	CP7733-2	CP746	CP746-2
Square Drive [in.]	1/2	1/2	1/2	1/2	1/2	1/2
Working Torque Range [Nm (ft.lbs)]	54-230 (40-170)	34-420 (25-310)	34-542 (25-400)	34-542 (25-400)	34-447 (25-330)	34-447 (25-330)
Max. Torque@90PSI Rev. [Nm (ft.lbs)]	271 (200)	576 (425)	746 (550)	746 (550)	610 (450)	610 (450)
Free Speed [rpm]	8,500	8,400	6,900	6,900	6,100	6,100
Weight [kg (lb)]	1.41 (3.1)	2.33 (5.13)	2.5 (5.6)	2.7 (5.9)	2.49 (5.5)	2.55 (5.63)
Length [mm (in.)]	152 (6)	232 (9.13)	180 (7.1)	231 (9.1)	191 (7.5)	222 (8.75)
Avg. Air Consumption [l/min. (CFM)]	85 (3)	106 (3.75)	106 (4.75)	106 (4.75)	135 (4.75)	135 (4.75)
Air Inlet Thread Size NPTF [in.]	1/4	1/4	1/4	1/4	1/4	1/4
Sound dB(A) Pressure	94	90	96	96	94.4	94.4
Vibration m/s ²	<2.5	3.4	4.0	4.0	4.5	4.5

See page 02 for specific test methods

Listed specifications are for reference only. Please check documents in each tool.



CP749 1/2" Super Duty Air Impact Wrench



- Tackle the tough jobs with the power and speed of this true workhorse
- Patented **SpringHammer** clutch provides smooth operation and extreme durability
- One hand push button forward/reverse power regulator. 4 positive power settings in forward and ultimate power in reverse
- Compact design with comfortable contoured handle
- **Ultimate Torque: 827Nm**

CP749K-Metric 1/2" Super Duty Air Impact Wrench Kit

Packed in a heavy duty carrying case, this kit includes the CP749 impact wrench plus 5 sockets: 14,16,17,19 & 22mm and a bottle of CP Air Tool oil

- **Ultimate Torque: 827Nm**

CP749K

1/2" Super Duty Air Impact Wrench Kit

Same great features as the CP749K with 1/2", 5/8", 3/4", 7/8", 15/16" sockets



CP749-2 1/2" Super Duty Air Impact Wrench



Same great features of the CP749 with a 2" extended anvil for tyre work

- **Ultimate Torque: 827Nm**

CP749-2K

1/2" Super Duty Air Impact Wrench Kit

Packed in a heavy duty carrying case, this kit includes the CP749-2 impact wrench plus two flip sockets: (3/4", 13/16") and (19mm, 21mm) and a bottle of CP Air Tool oil

- **Ultimate Torque: 827Nm**



CP7750 1/2" Extreme Duty Air Impact Wrench



- Still the Most Powerful 1/2" Impact Wrench on the planet, with 1085Nm of ultimate torque
- With innovative, patented new motor technology, the Turbo 2.0 pounds the most torque faster
- Best in industry at 1,500 bpm. That makes removing stubborn fasteners quick and easy
- Four position power regulator with 2 speeds in forward and 2 in reverse
- Professional touch trigger and ergonomic cushion grip handle provide comfort and control, even at high torque levels
- **Ultimate Torque: 1085Nm**



Turbo 2.0

CP7750-2 1/2" Extreme Duty Air Impact Wrench



Same great features as the CP7750 with a 2" extended anvil for tyre work

- **Ultimate Torque: 1085Nm**



Turbo 2.0

ULTIMATE TORQUE
1085Nm

	CP749	CP749-2	CP7750	CP7750-2
Square Drive [in.]	1/2	1/2	1/2	1/2
Working Torque Range [Nm (ft.lbs)]	68-610 (50-450)	68-610 (50-450)	68-746 (50-550)	68-746 (50-550)
Max. Torque@90PSI Rev. [Nm (ft.lbs)]	827 (625)	827 (625)	1085 (800)	1085 (800)
Free Speed [rpm]	6,400	6,400	6,400	6,400
Weight [kg (lb)]	2.49 (5.5)	2.49 (5.75)	2.27 (5)	2.31 (5.1)
Length [mm (in.)]	178 (7)	229 (9)	193 (7.6)	244 (9.6)
Avg. Air Consumption [l/min. (CFM)]	156 (5.5)	5.75	170 (6)	170 (6)
Air Inlet Thread Size NPTF [in.]	1/4	1/4	1/4	1/4
Sound dB(A) Pressure	95.4	95.4	94	94
Vibration m/s ²	4.9	4.9	4.4	4.4


Listed specifications are for reference only. Please check documents in each tool.

See page 02 for specific test methods



AIR IMPACT WRENCHES

CP770 3/4" Heavy Duty Air Impact Wrench

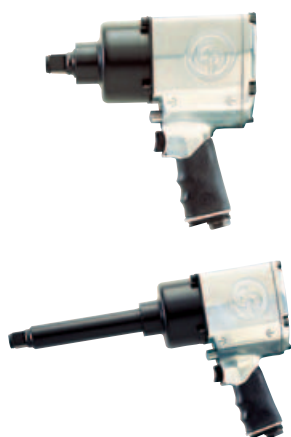

- Oil bath clutch delivers smooth operation and extended durability
- One hand push button forward/reverse power regulator. 4 positive power settings in forward and ultimate power in reverse
- Handle exhaust with 360° air inlet swivel to prevent hose kinks
- Ideal for spring work, truck and bus maintenance, farm machinery and truck tyre work
- **Ultimate Torque: 1559Nm.**

CP770-6

3/4" Heavy Duty Air Impact Wrench

Same great features as the CP770 with a 6" extended anvil for tyre work

CP772H 3/4" Heavy Duty Air Impact Wrench



- Smoothest operating 3/4" impact on the market with unmatched durability
- One hand push button forward/reverse power regulator. 4 positive power settings in forward and ultimate power in reverse
- Handle exhaust with 360° air inlet swivel to prevent hose kinks
- New comfortable contoured handle grip
- Ideal for spring work, truck and bus maintenance, farm machinery and construction equipment
- **Ultimate Torque: 1356Nm**

CP772HK-Metric

3/4" Heavy Duty Air Impact Wrench Kit

Packed in a heavy duty carrying case, this kit includes the CP772H plus 4 Metric deep sockets: 24, 27, 30 & 32 mm

- **Ultimate Torque: 1356Nm**



CP772HK

3/4" Heavy Duty Air Impact Wrench Kit

Same great features as the CP772HK with 15/16", 1", 1-1/16" and 1-1/8" deep sockets

CP772H-6

3/4" Heavy Duty Air Impact Wrench

Same great features as the CP772H with a 6" extended anvil for tyre work



CP776 3/4" Super Duty Air Impact Wrench



- Compact size with high output
- Rugged clutch mechanism for extended durability under heavy use
- One hand push button forward/reverse power regulator. 4 positive power settings in forward and ultimate power in reverse
- Perfect for spring work, pinion nut and tractor pad removal, truck tyre work and major engine tear downs
- **Ultimate Torque: 1559Nm**

CP776-6

3/4" Super Duty Air Impact Wrench

Same great features as the CP776 with a 6" extended anvil for tyre work

	CP770	CP770-6	CP776	CP776-6	CP772H	CP772H-6
Square Drive [in.]	3/4	3/4	3/4	3/4	3/4	3/4
Working Torque Range [Nm (ft.lbs)]	271-1017 (200-750)	271-1017 (200-750)	271-1017 (200-750)	271-1017 (200-750)	203-949 (150-700)	203-949 (150-700)
Max. Torque@90PSI Rev. [Nm (ft.lbs)]	1559 (1,150)	1559 (1,150)	1559 (1,150)	1559 (1,150)	1356 (1,000)	1356 (1,000)
Free Speed [rpm]	3,900	3,900	4,500	4,500	4,200	4,200
Weight [kg (lb)]	5.72 (12.6)	6.44 (14.2)	5.67 (12.5)	6.21 (13.7)	4.76 (10.5)	5.28 (11.63)
Length [mm (in.)]	226 (8.9)	368 (14.5)	222 (8.75)	375 (14.75)	245 (9.6)	394 (15.5)
Avg. Air Consumption [l/min. (CFM)]	276 (9.75)	276 (9.75)	220 (7.75)	220 (7.75)	170 (6)	170 (6)
Air Inlet Thread Size NPTF [in.]	3/8	3/8	3/8	3/8	3/8	3/8
Sound dB(A) Pressure	96.8	96.8	99.1	99.1	98.3	98.3
Vibration m/s ²	8	8	6	6	4.9	4.9

See page 02 for specific test methods

Listed specifications are for reference only. Please check documents in each tool.



CP771 1" Heavy Duty Air Impact Wrench



- 1" anvil in a 3/4" package
- High performance motor maximizes power output
- One hand push button forward/reverse power regulator. 4 positive power settings in forward and ultimate power in reverse
- Handle exhaust with 360° air inlet swivel to prevent hose kinks
- Ideal for spring work, truck and bus maintenance, farm machinery and truck tyre work
- **Ultimate Torque: 1559Nm**

CP771-6

1" Heavy Duty Air Impact Wrench

Same great features as the CP771 with a 6" extended anvil for tyre work

CP894 1" Heavy Duty Air Impact Wrench



- Oil bath clutch for smooth operation and extended durability
- One hand push button forward/reverse power regulator. 3 positive power settings in forward and ultimate power in reverse
- Adjustable side handle for added support
- Ideal for spring work, tractor pad removal, and off road equipment repair
- **Ultimate Torque: 2305Nm**

CP893 1" Heavy Duty Air Impact Wrench



- High performance motor maximizes power output
- One hand push button forward/reverse power regulator. 4 positive power settings in forward and ultimate power in reverse
- Adjustable dead handle for operator comfort
- Ideal for spring work, tractor pad removal, and off road equipment repair
- **Ultimate Torque: 1898Nm**

CP893-6

1" Heavy Duty Air Impact Wrench

Same great features as the CP893 with a 6" extended anvil for tyre work

CP796 1" Super Duty Air Impact Wrench



- Offers the most torque at 2712Nm
- Best power to weight ratio in a 1" air wrench
- Compact housing design for ease of use in tight areas
- Industrial quality and durability in an automotive tool
- Ideal for spring work, tractor pad removal and off road equipment repair
- **Ultimate Torque: 2712Nm**

CP796SP

1" Super Duty Air Impact Wrench

Same great features as the CP796 with a #5 spline

	CP771	CP771-6	CP893	CP893-6	CP894	CP796	CP796SP
Square Drive [in.]	1	3/4	1	1	1	1	#5 spline
Working Torque Range [Nm (ft.lbs)]	271-1017 (200-750)	271-1017 (200-750)	271-963 (200-710)	271-963 (200-710)	407-1627 (300-1,200)	407-1898 (300-1,400)	407-1898 (300-1,400)
Max. Torque@90PSI Rev. [Nm (ft.lbs)]	1559 (1,150)	1559 (1,150)	1898 (1,400)	1898 (1,400)	2305 (1,700)	2712 (2,000)	2712 (2,000)
Free Speed [rpm]	3,900	3,900	4,400	4,400	4,100	4,100	4,100
Weight [kg (lb)]	5.72 (12.7)	6.44 (14.3)	10.43 (23)	10.75 (23.7)	11.34 (25)	9.07 (20)	9.07 (20)
Length [mm (in.)]	226 (8.9)	368 (14.5)	292 (11.5)	445 (17.5)	298 (11.75)	241 (9.5)	241 (9.5)
Avg. Air Consumption [l/min. (CFM)]	276 (9.75)	276 (9.75)	290 (10.25)	290 (10.25)	319 (11.25)	368 (13)	368 (13)
Air Inlet Thread Size NPTF [in.]	3/8	3/8	3/8	3/8	1/2	1/2	1/2
Sound dB(A) Pressure	96.8	96.8	97.8	97.8	99.6	101	101
Vibration m/s ²	8	6	9.4	9.4	5	13	13

Listed specifications are for reference only. Please check documents in each tool.

See page 02 for specific test methods



AIR IMPACT WRENCHES

CP797 1" Super Duty Air Impact Wrench



- Long known as the workhorse of the truck tyre industry
- Rocking dog clutch for smooth operation and extreme durability
- Teasing throttle for easy bolt starting
- Convenient reverse valve for easy directional changes
- Choice of professional mechanics for high volume tyre work on trucks, buses and heavy equipment
- **Ultimate Torque: 1898Nm**

CP797-6 1" Super Duty Air Impact Wrench

- Truck tyre tool of choice
- Same great features as the CP797 with a 6" extended anvil for tyre work
- Choice of professional mechanics for high volume tyre work on trucks, buses and heavy equipment
- **Ultimate Torque: 1898Nm**

CP797SP-6 1" Super Duty Air Impact Wrench

- Same great features as the CP797 with a 6" extended anvil and #5 spline
- **Ultimate Torque: 1898Nm**

CP797TL-6 1" Torque Limiting Air Impact Wrench



- Same great features as the CP797 with a 6" extended anvil and torque limited
- Great for reducing the risk of over torquing lug nuts on truck wheels

CP797TLSP-6 1" Super Duty Air Impact Wrench

- Same great features as the CP797 with a 6" extended anvil, #5 spline, and torque limited

	CP797	CP797-6	CP797SP-6	CP797TL-6	CP797TLSP-6
Square Drive [in.]	1	1	#5 spline	1	#5 spline
Working Torque Range [Nm (ft.lbs)]	203-1220 (150-900)	203-1220 (150-900)	203-1220 (150-900)	813** (600)	813** (600)
Max. Torque@90PSI Rev. [Nm (ft.lbs)]	1898 (1,400)	1898 (1,400)	1898 (1,400)	1898 (1,400)	1898 (1,400)
Free Speed [rpm]	4,200	4,200	4,200	2,150	2,150
Weight [kg (lb)]	12.25 (27)	13.49 (29.75)	13.49 (29.75)	13.61 (30)	13.61 (30)
Length [mm (in.)]	394 (15.5)	565 (22.25)	565 (22.25)	629 (24.75)	629 (24.75)
Avg. Air Consumption [l/min. (CFM)]	283 (10)	283 (10)	283 (10)	163 (5.75)	163 (5.75)
Air Inlet Thread Size NPTF [in.]	1/2	1/2	1/2	1/2	1/2
Sound dB(A) Pressure	110	110	110	110	110
Vibration m/s ²	4.3	4.3	4.3	9.4	9.4

**813Nm on Budd Wheel steel rims, other applications, torque may vary

See page 02 for specific test methods

Listed specifications are for reference only. Please check documents in each tool.



CP897 1" Heavy Duty Air Impact Wrench



- Our lightest 1" air wrench at only 7.37kg
- Convenient reverse valve
- High performance motor maximizes output while minimizing air consumption
- Teasing throttle for easy bolt starting
- Perfect for high volume truck tyre shops
- **Ultimate Torque: 1763Nm**

CP897-6 1" Heavy Duty Air Impact Wrench

- Same great features as the CP897 with a 6" extended anvil for tyre work

CP897SP-6 1" Heavy Duty Air Impact Wrench

- Same great features as the CP897 with a 6" extended anvil and #5 spline

CP5000 1" Super Duty Air Impact Wrench



- Our strongest and most powerful 1" impact with extended anvil
- Four position power regulator
- Controllable throttle provides easy bolt starting
- 7" extended anvil for easy access to heavy equipment tyres
- Easy to use forward/reverse valve for quick directional changes
- Ideal for high volume tyre work on trucks, buses and heavy equipment
- **Ultimate Torque: 2712Nm**

CP898 1" Heavy Duty Air Impact Wrench



- Lightweight at only 10.2kg
- Rocking dog clutch for smooth operation and extreme durability
- Convenient reverse valve for easy directional changes
- High performance motor maximizes out put while minimizing air consumption
- Perfect for high volume truck tyre shops
- **Ultimate Torque: 1763Nm.**

CP898-6 1" Heavy Duty Air Impact Wrench

- Same great features as the CP898 with a 6" extended anvil for tyre work
- **Ultimate Torque: 1763Nm**

CP7775 1" Heavy Duty Air Impact Wrench



- The MOST power in its class
- At only 10.6kg, reduces operator fatigue
- Directs air away from operator and work area
- Four position power control in forward and reverse
- Ergonomically designed handles and trigger
- **Ultimate Torque: 2102Nm**

CP7775-6 1" Heavy Duty Air Impact Wrench

- Same great features as the CP7775 with a 6" extended anvil for tyre work
- **Ultimate Torque: 2102Nm**

CP7775SP-6 1" Super Duty Air Impact Wrench

- CP7775 with a 6" extended anvil and #5 spline
- **Ultimate Torque: 2102Nm**

	CP897	CP897-6	CP897SP-6	CP898	CP898-6	CP5000	CP7775	CP7775-6
Square Drive [in.]	1	1	#5 spline	1	1	1	1	1
Working Torque Range [Nm (ft.lbs)]	203-1085 (150-800)	203-1085 (150-800)	203-1085 (150-800)	203-1085 (150-800)	203-1085 (150-800)	502-2169 (370-1,600)	136-1627 (100-1,200)	136-1627 (100-1,200)
Max. Torque@90PSI Rev. [Nm (ft.lbs)]	1763 (1,300)	1763 (1,300)	1763 (1,300)	1763 (1,300)	1763 (1,300)	2712 (2,000)	2102 (1,550)	2102 (1,550)
Free Speed [rpm]	3,800	3,800	3,800	4,200	4,200	4,100	5,500	5,500
Weight [kg (lb)]	7.37 (16.25)	8.62 (19)	8.62 (19)	10.2 (22.5)	10.88 (24)	13.83 (30.5)	10.6 (22.2)	12.5 (25.4)
Length [mm (in.)]	349 (13.75)	502 (19.75)	502 (19.75)	343 (13.5)	495 (19.5)	572 (22.5)	340 (13.4)	513 (20.2)
Avg. Air Consumption [l/min. (CFM)]	184 (6.5)	184 (6.5)	184 (6.5)	227 (8)	227 (8)	336 (11.8)	248 (8.75)	248 (8.75)
Air Inlet Thread Size NPTF [in.]	1/2	1/2	1/2	1/2	1/2	1/2	1/2	1/2
Sound dB(A) Pressure	101	101	101	103	103	103.1	96	96
Vibration m/s ²	7.5	7.5	7.5	11	11	8.9	9.1	9.1

Listed specifications are for reference only. Please check documents in each tool.

See page 02 for specific test methods





Cordless Impact Wrenches

CP's new line of cordless impact wrenches are hard hitting with lots of torque providing the speed, power and durability you need to get the job done. These tools feature best in class amp hours for longest power supply, and are ergonomically designed for comfort, control and easy handling. They are ideal for small engine or general automotive repair.



CP8730 Models E, U, N 3/8" Cordless Impact Wrench

NEW



- Fastest in its class at 2,600 rpm
 - Hard hitting - up to 3,500 blows per minute
 - High torque; light, compact, well balanced design
 - Perfect for small engine and general automotive repair work
 - All kits come in heavy duty carrying case
 - **Ultimate Torque: 119Nm**
- Kit includes:
Model E -European
CP8730 Impact
2-14.4 Volt (2.4Ah) Ni-Cd Batteries
Universal charger with European 2 pin Plug
Model U -UK
CP8730 Impact
2-14.4 Volt (2.4Ah) Ni-Cd Batteries
Universal charger with UK 3 pin plug
Model N -Nickel Metal Hydride
CP8730 Impact
2-14.4 Volt (2.4Ah) Ni-Mh Batteries
Universal charger with European 2 pin plug

CP8740 Models E, U, N 1/2" Cordless Impact Wrench CP8745 Models E, U, N 1/2" Cordless Impact Wrench

NEW



- Same great features of the CP8730 with a 1/2" square drive
 - **Ultimate Torque: 159Nm**
- Kit includes:
Model E -European
CP8740 Impact
2-14.4 Volt (2.4Ah) Ni-Cd Batteries
Universal charger with European 2 pin Plug
Model U -UK
CP8740 Impact
2-14.4 Volt (2.4Ah) Ni-Cd Batteries
Universal charger with UK 3 pin plug
Model N -Nickel Metal Hydride
CP8740 Impact
2-14.4 Volt (2.4Ah) Ni-Mh Batteries
Universal charger with European 2 pin plug



NEW

- Most torque at 325Nm of any cordless impact wrench
 - Mid-handle design for comfort and balance
 - Variable speed trigger
 - **Ultimate Torque: 325Nm**
- Kit includes:
Model E -European
CP8745 Impact
2-18 Volt (2.4Ah) Ni-Cd Batteries
Universal charger with European 2 pin Plug
Model U -UK
CP8745 Impact
2-18 Volt (2.4Ah) Ni-Cd Batteries
Universal charger with UK 3 pin plug
Model N -Nickel Metal Hydride
CP8745 Impact
2-18 Volt (2.4Ah) Ni-Mh Batteries
Universal charger with European 2 pin plug

	CP8730	CP8740	CP8745
Square Drive [in.]	3/8	1/2	1/2
Working Torque Range [Nm (ft.lbs)]	14-119 (10-88)	14-159 (10-117)	14-325 (10-240)
Max. Torque Rev. [Nm (ft.lbs)]	119 (88)	159 (117)	325 (240)
Blows Per Minute	3,500	3,500	2,200
Free Speed [rpm]	2,600	2,600	1,400
Weight [kg (lb)]	1.97 (4.34)	1.99 (4.38)	4.08 (9)
Length [mm (in.)]	193 (7.6)	196 (7.7)	300 (11.8)
Battery Voltage	14.4	14.4	18

Listed specifications are for reference only. Please check documents in each tool.

See page 02 for specific test methods



A black and white photograph showing a close-up of a hand holding an air ratchet. The hand is positioned to operate the tool, which has a distinctive anti-slip head. The background is blurred, showing industrial equipment.

Air Ratchets

We're proud to introduce our latest innovation in air ratchets; the **TriSpring** anti-slip head, which virtually eliminates slippage while reducing the potential for heat build up, even in long run downs. We offer a wide selection of ratchets for every task, all with ergonomic design, high power, light weight and compact size for easy access in tough spots.



CP824 1/4" Standard Duty Air Ratchet



- Easy speed control throughout range. Maximum rundown speed of 220 rpm
- Extended length - designed for greater reach in confined areas
- Compact and lightweight
- Excellent for under-dashboard work, small engine repair and small fasteners
- **Ultimate Torque: 17Nm**

CP824T 3/8" Standard Duty Ratchet

- Same great features as the CP824 in a 3/8" square drive
- **Ultimate Torque: 17Nm**

CP826 1/4" Super Duty Air Ratchet



- Exceptional durability with an advanced head design that virtually eliminates slippage
- Urethane grip for comfort and control
- Extended length - designed for greater reach in confined areas
- Faster rundown with 250 rpms
- Excellent for under-dashboard work, small engine repair and body shops
- **Ultimate Torque: 20Nm**

CP826T 3/8" Super Duty Ratchet

- Same great features as the CP826 in a 3/8" square drive
- **Ultimate Torque: 20Nm**

CP825 1/4" Heavy Duty Air Ratchet



- Convenient forward/reverse button for one finger directional changes
- Compact and lightweight with a square handle design for a positive grip
- Easy speed control throughout the range
- Maximum rundown speed of 200 rpm
- Excellent for under-dashboard work, small engine repair and small fasteners
- **Ultimate Torque: 20Nm**

CP825T 3/8" Heavy Duty Ratchet

- Same great features as the CP825 in a 3/8" square drive
- **Ultimate Torque: 20Nm**

CP886 3/8" Standard Duty Air Ratchet



- Compact head design allows greater flexibility in confined areas
- Easy to grip reverse lever for simple directional changes
- Hardened gears provide greater durability over other economically priced ratchets
- Ideal for installing or removing spark plugs, radiators, water pumps and exhaust systems
- **Ultimate Torque: 68Nm**

CP886H 1/2" Standard Duty Ratchet

- Same great features as the CP886 in a 1/2" square drive
- **Ultimate Torque: 68Nm**

	CP824	CP824 T	CP825	CP825T	CP826	CP826T	CP886	CP886H
Square Drive [in.]	1/4	3/8	1/4	3/8	1/4	3/8	3/8	1/2
Working Torque Range [Nm (ft.lbs)]	7-17 (5-12.5)	7-17 (5-12.5)	7-20 (5-15)	7-20 (5-15)	7-20 (5-15)	20 (5-15)	14-68 (10-50)	14-68 (10-50)
Max. Torque@90PSI Rev. [Nm (ft.lbs)]	17 (12.5)	17 (12.5)	20 (15)	20 (15)	20 (15)	7-20 (15)	68 (50)	68 (50)
Free Speed [rpm]	220	220	200	200	250	250	160	160
Weight [kg (lb)]	0.51 (1.13)	0.51 (1.13)	0.85 (1.88)	0.85 (1.88)	0.51 (1.13)	0.51 (1.13)	1.19 (2.63)	1.19 (2.63)
Length [mm (in.)]	197 (7.75)	197 (7.75)	165 (6.5)	165 (6.5)	203 (8)	203 (8)	260 (10.25)	260 (10.25)
Avg. Air Consumption [l/min. (CFM)]	106 (3.75)	106 (3.75)	78 (2.75)	78 (2.75)	99 (3.5)	99 (3.5)	120 (4.25)	120 (4.25)
Air Inlet Thread Size NPTF [in.]	1/4	1/4	1/4	1/4	1/4	1/4	1/4	1/4
Sound dB(A) Pressure	90.4	90.4	87	87	87	87	98.2	98.2
Vibration m/s ²	5.4	5.4	4.5	4.5	4.6	4.6	8.9	8.9

Listed specifications are for reference only. Please check documents in each tool.

See page 02 for specific test methods



AIR RATCHETS

CP7830Q 3/8" Super Duty Air Quiet Ratchet



Quiet!
As low as 79 dB(A)



- Adjustable noise level - as low as 79 dB(A)
- Highest torque available on the market
- Patented TriSpring ratchet
- Lightweight and well balanced
- **Ultimate Torque: 122Nm**

CP7830HQ 1/2" Super Duty Quiet Ratchet

- Same great features as the CP7830Q in a 1/2" square drive

CP7830HQK 1/2" Super Duty Quiet Ratchet Kit

- This heavy duty kit includes the CP7830HQ air ratchet plus 5 sockets packed in a heavy duty carrying case. Socket sizes 10, 13, 14, 16, 17mm
- **Ultimate Torque: 122Nm**

CP828 3/8" Heavy Duty Air Ratchet



New Head Design



- Features CP's new **TriSpring** anti-slip head design which virtually eliminates slippage while reducing the potential for heat build-up, even in long run downs
- Compact, yet packed with power and speed
- **Ultimate Torque: 68Nm**

CP828K-Metric 3/8" Heavy Duty Ratchet Kit

- This heavy duty kit includes the CP828 air ratchet plus 5 sockets packed in a heavy duty carrying case. Socket sizes 10, 13, 14, 16 & 17mm
- **Ultimate Torque: 68Nm**

CP828K 3/8" Heavy Duty Ratchet Kit

- Same great features as the CP828H with 3/8", 7/16", 1/2" 9/16", and 5/8" sockets

CP828H 1/2" Heavy Duty Ratchet

- Same great features as the CP828 with a 1/2" square drive
- **Ultimate Torque: 68Nm**

CP828HK-Metric 1/2" Heavy Duty Ratchet Kit

- This heavy duty kit includes the CP828H air ratchet plus 5 sockets packed in a heavy duty carrying case. Socket sizes 10, 13, 14, 16 & 17mm



CP7830 3/8" Super Duty Air Ratchet



- CP's new high powered ratchet offers the **most torque** at 122Nm 190 rpm
- Aircraft quality aluminum for light weight durability and great balance
- Only weighs 1.22 Kg
- Features CP's new **TriSpring** anti-slip head design which virtually eliminates slippage while reducing the potential for heat build-up, even in long rundowns
- Premium tool for brake work, transmission and engine work when you need extra torque
- **Ultimate Torque: 122Nm**



New Head Design

	CP7830Q	CP7830HQ	CP7830	CP828	CP828H
Square Drive [in.]	3/8	1/2	3/8	3/8	1/2
Working Torque Range [Nm (ft.lbs)]	14-136 (10-90)	14-136 (10-90)	14-122 (10-90)	14-68 (10-50)	14-68 (10-50)
Max. Torque@90PSI Rev. [Nm (ft.lbs)]	122 (90)	122 (90)	122 (90)	68 (50)	68 (50)
Free Speed [rpm]	190	190	190	150	150
Weight [kg (lb)]	1.2 (2.7)	1.2 (2.7)	1.22 (2.7)	1.08 (2.4)	1.08 (2.4)
Length [mm (in.)]	300 (12)	300 (12)	305 (12)	254 (10)	254 (10)
Avg. Air Consumption [l/min. (CFM)]	5	5	131 (4.63)	106 (3.75)	106 (3.75)
Air Inlet Thread Size NPTF [in.]	1/4	1/4	1/4	1/4	1/4
Sound dB(A) Pressure	85	85	92	96.5	96.5
Vibration m/s ²	9	9	13.5	9.5	9.5

See page 02 for specific test methods

Listed specifications are for reference only. Please check documents in each tool.





Air Finishing Tools

Finishing work provides a wide range of challenges and we have a complete line of sanders, buffers and polishers for every application from heavy material removal to fine finishing. We now offer the SMART series mini sander and polisher kits to get the job done faster and easier, and new central and self vacuum palm sanders to help maintain a dust free environment.



MINI SANDERS & POLISHERS

CP778 Heavy Duty Hi-Speed Sander



- Built-in regulator and variable speed throttle for precise speed control
- Rugged, energy efficient 370W motor
- For small jobs and hard to reach spots, this hi-speed sander is ideal for paint removal, shaping filler patches, weld smoothing, and rust removal
- Lightweight, low vibration for easy handling
- **Free Speed: 14,000 rpm**

CP7202 Mini Disc Sander Kit



- Compact and lightweight for easy access in tight areas
- Rubber molded palm grip for added comfort
- Adjustable power regulator
- Two finger throttle for easier control and less fatigue
- Silenced handle exhaust directs air away from work area
- **Free Speed: 15,000 rpm**

CP7202D Mini Disc Sander Kit

Kit includes: CP7202 mini disc sander plus (1) 75mm backing pad, (10) 75mm 80, 100 and 120 grit sanding discs, (1) 75mm fine, medium and coarse surface prep discs and spindle wrench packed in a heavy duty carrying case

SMART SERIES

CP's new Small Area Repair Technique tool kits. Instead of using a 150mm for a 25mm scratch or ding you can use these new 50mm and 75mm tools designed to get the job done faster and easier.

CP7200 Mini Random Orbital Sander Kit



- Compact and lightweight for easy access in tight areas
- Rubber molded palm grip for added comfort
- Adjustable power regulator
- Two finger throttle for easier control and less fatigue
- Silenced handle exhaust directs air away from work area
- **Free Speed: 15,000 rpm**

CP7200S

Mini Random Orbital Sander Kit

Kit includes: CP7200 Mini random orbital sander plus (1) 50mm and 75mm backing pads, (10) 50mm 320, 400 and 600 grit sand paper, and spindle key packed in a heavy duty carrying case



CP7201 Mini Disc Polisher Kit



- Compact and lightweight for easy access in tight areas
- Rubber molded palm grip for added comfort
- Adjustable power regulator
- Two finger throttle for easier control and less fatigue
- Silenced handle exhaust directs air away from work area
- **Free Speed: 2,500 rpm**

CP7201P

Mini Disc Polisher Kit

Kit includes: CP7201 mini disc polisher plus (1) 75mm backing pad, (2) 77mm foam compounding pads (white/yellow), (1) 77mm wool buffing pad and spindle wrench packed in a heavy duty carrying case



	CP778	CP7202	CP7200	CP7201
Paper Size [mm (in.)]	127 (5)	76 (3)	51,76 (2,3)	76 (3)
Free Speed [rpm]	14,000	15,000	15,000	2,500
Weight [kg (lb)]	1.02 (2.25)	0.68 (1.5)	0.68 (1.5)	0.79 (1.75)
Avg. Air Consumption [l/min. (CFM)]	297 (10.5)	297 (10.5)	297 (10.5)	297 (10.5)
Actual Air Consumption [l/min. (CFM)]	595 (21)	595 (21)	595 (21)	510 (18)
Air Inlet Thread Size NPTF [in.]	1/4	1/4	1/4	1/4
Minimum Hose Size [mm (in.)]	10 (3/8)	10 (3/8)	10 (3/8)	10 (3/8)
Sound dB(A) Pressure	99.5	84.8	86.2	88
Vibration m/s ²	<2.5	3.1	7.1	<2.5

See page 02 for specific test methods

Listed specifications are for reference only. Please check documents in each tool.

CP766 Heavy Duty Palm Sander



- Heavy duty ball bearing construction for durable operation
- Pre-set regulator valve controls air pressure to assure optimum tool life
- Comfortable rubber grip handle
- Excellent for sanding wet or dry paint, fiberglass, plastic and wood
- **Max rpm: 8,000**

CP7220E Random Orbital Palm Sander



- 2.5 mm orbit for high quality finishing
- Easy to handle, compact and light-weight, providing the best power to weight ratio in its class
- 224W oil free motor delivers the power you need to get the job done while keeping the work area free of contaminants
- Triple balance design provides balance with low vibration for superior control
- Adjustable speed regulator with safety shut off for maximum control
- Non-vacuum (CP7220E)
- Self-vacuum (CP7220SVE)
- Central vacuum (CP7220CVE)
- Max rpm: 12,000

CP7220
Random Orbital Palm Sander
Same great features as the CP7220E with PSA sanding pad

CP7250E Random Orbital Palm Sander



- 5mm orbit for standard finishing applications plus the same great features as the CP7220E
- Non-vacuum (CP7250E)
- Self-vacuum (CP7250SVE)
- Central vacuum (CP7250CVE)
- Max rpm: 12,000

CP7250
Random Orbital Palm Sander
Same great features as the CP7250E with PSA sanding pad

	CP766	CP7220E	CP7250E
Paper Size [mm (in.)]	93 x 229 (3.66 x 9)	150 (6)	150 (6)
Maximum [rpm]	8,000	12,000	12,000
Weight [kg (lb)]	2.15 (4.75)	0.68 (1.7)	0.68 (1.7)
Avg. Air Consumption [l/min. (CFM)]	198 (7)	297 (8.3)	297 (8.3)
Actual Air Consumption [l/min. (CFM)]	396 (14)	595 (16.6)	595 (16.6)
Air Inlet Thread Size NPTF [in.]	1/4	1/4	1/4
Minimum Hose Size [mm (in.)]	10 (3/8)	10 (3/8)	10 (3/8)
Sound dB(A) Pressure	90	76	76
Vibration m/s ²	9	<2.5	<2.5

Listed specifications are for reference only. Please check documents in each tool.

See page 02 for specific test methods



HANDLE GRIP SANDERS

CP760 Series Random Orbital Sanders



- Ergonomically designed for maximum comfort, the CP760 Series handle grip sanders are lightweight with low vibration and low sound levels
- Non-vacuum and self-vacuum models available with 5mm or 10mm orbit
- Excellent for blending and smoothing filler, final filler and feather edging and body filler removal
- **Max rpm: 9,500**

*Models CP 760 and CP761 are dust collection models with a self-induced vacuum. Allows sander to be used with dust bag.

CP864 Heavy Duty Random Orbital Sander



- Rotary and orbital motion for rapid removal as well as fine finishing
- Sure-grip insulated handle
- Crossbolt-style hub mounting minimizes vibration
- Circular exhaust diffuses air flow
- Ideal for blending and smoothing filler, feather edging and pre-paint preparation
- **Max rpm: 10,000**

CP870 Dual Action Sander



- Rotary and orbital motion for rapid removal as well as fine finishing
- Power regulator for precise control
- Lock off throttle to prevent accidental start ups
- Insulated grip for added comfort
- Excellent for blending and smoothing filler, feather edging and pre-paint preparation
- **Max rpm: 10,000**

	CP760*	CP761*	CP763	CP764	CP864	CP870
Paper Size [mm (in)]	150 (6)	150 (6)	150 (6)	150 (6)	150 (6)	150 (6)
Maximum rpm	9,500	9,500	9,500	9,500	10,000	10,000
Orbit [mm.]	10	5	5	10	10	10
Weight [kg (lbs)]	1.59 (3.5)	1.59 (3.5)	1.59 (3.5)	1.59 (3.5)	1.81 (4)	1.93 (4.25)
Avg. Air Consumption [l/min (CFM)]	340 (12)	340 (12)	340 (12)	340 (12)	227 (8)	227 (8)
Actual Air Consumption [l/min (CFM)]	680 (24)	680 (24)	680 (24)	680 (24)	453 (16)	453 (18)
Air Inlet Thread Size NPTF [in.]	1/4	1/4	1/4	1/4	1/4	1/4
Minimum Hose Size [mm (in)]	10 (3/8)	10 (3/8)	10 (3/8)	10 (3/8)	10 (3/8)	3/8 (10)
Sound dB(A) Pressure	84	84	84	84	86	85
Vibration m/s ²	4	4	4	4	<2.5	6.2

See page 02 for specific test methods

Listed specifications are for reference only. Please check documents in each tool.



CP768 Heavy Duty Dual Piston Straight Line Sander

- Dual piston provides smooth, balanced sanding action
- Automatic release trigger with positive stop action
- Molded edge pad with dimple-free surface for smooth finishing and prevention of grit build-up
- Excellent for all types of surface preparation and rapid removal of material from large surfaces
- **Max rpm: 3,000 - 1" strokes per minute**

CP777 Heavy Duty Orbital Sander

- Balanced counterweight design
- Patented, non-rotating gear housing makes tool easy to handle
- Smooth strength and power for shaping, blending and smoothing body filler and rapid material removal
- **Max rpm: 900**

CP865S Heavy Duty Vertical Sander

- Rugged 750W motor
- Automatic release throttle with positive stop action
- Muffled handle exhaust to vent air away from work surface
- Perfect for roughing in body filler, weld smoothing, paint and rust removal
- **Max rpm: 5,000**

CP869S Heavy Duty Angle Sander

- Contoured throttle control for easy handling
- Hardened and ground spiral bevel gears for low vibration and long life
- With up to 5,000 rpm free speed, you can work faster on heavy rust removal, sanding of metal and shaping of contoured filler patches
- **Max rpm: 5,000**

	CP768	CP777	CP865S	CP869S
Paper Size [mm (in)]	70x445 (2.75x17.5)	203 (8)	178 (7)	178 (7)
Maximum rpm	3,000	900	5,000	5,000
Weight [kg (lbs)]	3.06 (6.75)	1.93 (4.25)	2.04 (4.5)	2.95 (6.5)
Avg. Air Consumption [l/min (CFM)]	283 (10)	227 (8)	319 (11.25)	375 (13)
Actual Air Consumption [l/min (CFM)]	566 (20)	453 (16)	637 (22.5)	750 (26.5)
Air Inlet Thread Size NPTF [in.]	1/4	1/4	1/4	1/4
Minimum Hose Size [mm (in)]	10 (3/8)	10 (3/8)	10 (3/8)	10 (3/8)
Sound dB(A) Pressure	85	97	87	100.3
Vibration m/s ²	7	9	6.2	10.2

Listed specifications are for reference only. Please check documents in each tool.

See page 02 for specific test methods



BELT SANDERS & POLISHERS

CP858 Belt Sander



- 10mm belt capacity with quick change belt replacement
- Adjustable sanding arm
- Handle exhaust
- Excellent for paint removal, weld sanding, smoothing and rust removal
- **Max rpm: 18,000**

CP8210 Electric Polishers



- Lightest available electric polisher
- Powerful 10 AMP motor
- Electronic power regulator provides precise control and flexibility
- Unique, durable gearing for high spindle torque and smooth operation
- UK3 pin plug w/4m heavy duty cable
- **Max rpm: 2,500**

CP8210E

Electric Polisher

Same great features as the CP8210
European 2 pin plug w/4m heavy duty cable

CP865P Vertical Polisher



- Rugged 750W motor
- Automatic release trigger with positive stop action
- "Flex-edge" polishing pad to eliminate scorching
- Silenced handle exhaust
- Ideal for buffing and polishing paint, metal, wood or plastic to a smooth, flawless finish
- **Max rpm: 2,500**

CP869P Angle Polisher



- "Flex-edge" polishing pad to help eliminate scorching
- Built-in air regulator
- Silenced rear exhaust
- Excellent for buffing and polishing flat and contoured surfaces
- **Max rpm: 2,500**

	CP858	CP8210	CP8210E	CP865P	CP869P
Paper Size [mm (in)]	10x330 (3/8x13)	150	150	203 (8)	203 (8)
Maximum rpm	18,000	2,500	2,500	2,500	2,500
Weight [kg (lbs)]	0.85 (1.88)	2.6 (5.7)	2.6 (5.7)	2.04 (4.5)	2.95 (6.5)
Avg. Air Consumption [l/min (CFM)]	311 (11)	-	-	319 (11.25)	375 (13)
Actual Air Consumption [l/min (CFM)]	623 (22)	-	-	665 (23.5)	821 (29)
Air Inlet Thread Size NPTF [in.]	1/4	-	-	1/4	1/4
Minimum Hose Size [mm (in)]	10 (3/8)	-	-	10 (3/8)	10 (3/8)
Sound dB(A) Pressure	92.8	-	-	90.8	102.1
Vibration m/s ²	<2.5	-	-	<2.5	<2.5

See page 02 for specific test methods

Listed specifications are for reference only. Please check documents in each tool.





Air Cutting Tools & Grinders

We offer a versatile range of tools for everything from muffler and exhaust work to cutting through sheet metal, smoothing, and blending. All ergonomically designed for comfort, control and easy handling.



RECIPROCATING SAWS

CP7901 Super Duty Recip Saw



- LOWEST VIBRATION on the market
- Power at 10,000 strokes per minute allows you to cut through material with ease
- Adjustable guard/guide allows operator to set depth of cut
- Ergonomic design for comfort and easy handling
- Premium tool for body, exhaust work
- **10,000 strokes per minute**

CP7901K Super Duty Recip Saw Kit

- This heavy duty kit includes the CP7901 reciprocating saw plus (5) each replacement blades: 18T, 24T, 32T packed in a heavy duty carrying case

CP7900 Standard Duty Recip Saw



- Power at 10,000 strokes per minute allows you to cut through material with ease
- Adjustable guard/guide allows operator to set depth of cut
- Ergonomic design for comfort and easy handling
- Includes (1) each replacement blades: 18T, 28T, 32T
- Economical tool for body exhaust and muffler work
- **10,000 strokes per minute**

CP881 Heavy Duty Recip Saw



- Heavy duty construction for long life under heavy use
- Adjustable guard/guide allows operator to set depth of cut
- Comfortable rubber grip
- **9,500 strokes per minute**


	CP7901	CP7900	CP881
Strokes per Minute	10,000	10,000	9,500
Weight [kg (lbs.)]	0.86 (1.9)	0.59 (1.3)	0.74 (1.63)
Length [mm (in.)]	229 (9)	216 (8.5)	219 (8.63)
Actual Air Consumption [l/min (CFM)]	156 (5.5)	156 (5.5)	170 (6)
Air Inlet Thread Size NPTF [in.]	1/4	1/4	1/4
Minimum Hose Size [mm (in.)]	10 (3/8)	10 (3/8)	10 (3/8)
Sound dB(A) Pressure	88.3	92.3	97.7
Vibration m/s ²	4	20.1	12.9

See page 02 for specific test methods

Listed specifications are for reference only. Please check documents in each tool.

CP876 Mini Die Grinder

- Compact, lightweight design for easy manoeuvrability
- Built-in regulator
- Complete with 1/4" and 6mm collet
- Excellent for high speed blending, smoothing, porting and deburring in confined areas
- **Max rpm: 30,000**

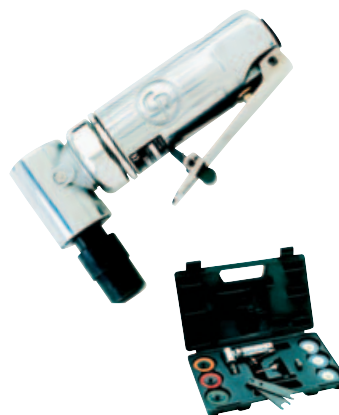CP875 Mini Angle Die Grinder

- Compact, lightweight design for easy manoeuvrability
- 90° angle head allows flexibility in confined areas
- Complete with 1/4" and 6mm collet
- Excellent for high speed blending, smoothing, porting, and deburring in confined areas
- **Max rpm: 22,500**

CP875K**Mini Angle Die Grinder Kit**

Same great features as the CP875 plus:

- (1) 50mm backing pad,
 - (2) 50mm coarse surface prep pad,
 - (2) 50mm medium surface prep pad,
 - (2) 50mm fine surface prep pad,
 - (2) 50mm 50 grit sanding disc,
 - (2) 50mm 36 grit sanding disc,
 - (2) 50mm 24 grit sanding disc
- packed in a heavy duty carrying case

CP856 Heavy Duty Straight Die Grinder

- Insulated grip for greater operator comfort
- Adjustable speed regulator for precise control
- Lock off throttle to prevent accidental start up
- Excellent for blending, smoothing, porting, and deburring in confined areas
- **Max rpm: 25,000**

CP860 Heavy Duty Die Grinder

- Rugged, energy efficient 370W motor
- Adjustable power regulator for precise control
- Lock off throttle to prevent accidental start ups
- Square handle design for positive grip
- Complete with 1/4" and 6mm collet
- Excellent for cleaning tyre moldings, porting and relieving engines, and general high-speed polishing and grinding
- **Max rpm: 24,000**

CP860 E**Heavy Duty Die Grinder**

- Same great features as the CP860 with a 6mm collet

CP860 ES**Heavy Duty Die Grinder**

- Same great features as the CP860 with a 150mm extended shank
- **Max rpm: 24,000**

CP860 ESE**Heavy Duty Grinder**

- Same great features as the CP860ES with a 6mm collet

	CP876	CP875	CP856	CP860	CP860ES
Collet/Spindle [in]	1/4	1/4	1/4	1/4	1/4
Maximum rpm	30,000	22,500	25,000	24,000	24,000
Weight [kg (lbs)]	0.34 (0.75)	0.45 (1)	0.43 (0.95)	0.57 (1.25)	0.95 (2.1)
Avg. Air Consumption [l/min (CFM)]	339 (12)	311 (11)	169 (6)	297 (10.5)	297 (10.5)
Actual Air Consumption [l/min (CFM)]	679 (24)	628 (22)	368 (13)	555 (21)	555 (21)
Air Inlet Thread Size NPTF [in.]	1/4	1/4	1/4	1/4	1/4
Minimum Hose Size [mm (in)]	10 (3/8)	10 (3/8)	10 (3/8)	10 (3/8)	10 (3/8)
Sound dB(A) Pressure	96.1	101.3	<85	92.6	93
Vibration m/s ²	5.4	3	6.4	4.8	4.8

Listed specifications are for reference only. Please check documents in each tool.

See page 02 for specific test methods



GRINDERS

CP872 Standard Duty Die Grinder



- Adjustable power regulator for precise control
- Lock off throttle to prevent accidental start up
- Excellent for tyre scuffing, cleaning tyre moldings and general high speed polishing and grinding
- **Max rpm: 22,000**

CP862 Heavy Duty Grinder



- 90° angle head for easy accessibility
- Insulated grip for greater operator comfort
- Adjustable speed regulator for precise control
- Lock off throttle to prevent accidental start up
- Excellent for blending, smoothing, porting, and deburring in confined areas
- **Max rpm: 22,000**

CP854 4" Heavy Duty Angle Grinder



- Powerful 450W high performance motor for fast, efficient grinding in tight quarters
- Aluminum alloy housing is rugged yet lightweight for maximum operator comfort
- Spiral bevel gearing in angle head provides extended life and smooth low vibration
- Excellent for weld preparation and smoothing, rust removal, deburring and blending of steel, cast iron and aluminum
- **Max rpm: 12,000**

CP863 Heavy Duty Grinder



- 120° angle head for easy accessibility
- Insulated grip for greater operator comfort
- Adjustable speed regulator for precise control
- Lock off throttle to prevent accidental start up
- Excellent for blending, smoothing, porting, and deburring in confined areas
- **Max rpm: 22,000**

CP854E
5" Heavy Duty Angle Grinder
 Same great features as the CP854 with a 127mm guard

CP857 7" Heavy Duty Angle Grinder



- Powerful 950W high performance motor for fast metal removal
- Aluminum alloy housing is rugged, yet lightweight
- Spiral bevel gearing in angle head provides extended life and smooth low vibration
- Excellent for weld preparation and smoothing, rust removal, deburring and blending of steel, cast iron and aluminum
- **Max rpm: 7,500**

	CP872	CP862	CP863	CP854	CP854E	CP857
Collet/Spindle [in]	1/4	1/4	1/4	3/8-24	10mm x 1.5P	5/8-11
Wheel Size [mm (in)]	-	-	-	100 (4)	127 (5)	178 (7)
Maximum rpm	22,000	22,000	22,000	12,000	12,000	7,500
Weight [kg (lbs)]	0.57 (1.25)	0.51 (1.13)	0.51 (1.13)	1.7 (3.75)	1.7 (3.75)	2.83 (6.25)
Length [mm (in)]	146 (5.75)	157 (6.19)	187 (7.38)	229 (9)	229 (9)	334 (13.13)
Avg. Air Consumption [l/min (CFM)]	368 (13)	297 (10.5)	290 (10.25)	340 (12)	340 (12)	340 (12)
Actual Air Consumption [l/min (CFM)]	736 (26)	595 (21)	580 (20.5)	679 (24)	679 (24)	679 (24)
Air Inlet Thread Size NPTF [in.]	1/4	1/4	1/4	1/4	1/4	1/4
Minimum Hose Size [mm (in)]	10 (3/8)	10 (3/8)	10 (3/8)	10 (3/8)	10 (3/8)	10 (3/8)
Sound dB(A) Pressure	100.9	91.7	92	85	85	101.9
Vibration m/s ²	<2.5	<2.5	<2.5	4.8	4.8	2.7

See page 02 for specific test methods

Listed specifications are for reference only. Please check documents in each tool.



CP871 High Speed Tyre Buffer


- Adjustable speed regulator for precise control
- Jacob's chuck for holding buffing accessories
- Lock off throttle to prevent accidental start ups
- Rear exhaust directs air away from the work area
- Ideal for patchwork, roughing areas for recapping and cleaning tyre moldings
- **Max rpm: 22,000**

CP873 Low Speed Tyre Buffer


- Quick change slip chuck for fast and easy change of buffing wheel
- Adjustable speed regulator for precise control
- Lock off throttle to prevent accidental start ups
- Rear exhaust directs air away from the work area
- Ideal for patchwork, roughing areas for recapping and cleaning tyre moldings
- **Max rpm: 2,800**

CP873K
Low Speed Tyre Buffer Kit

Same great tool as the CP873 with a whip hose, and exhaust hose

	CP871	CP873	CP873K
Chuck/Wheel Size [in.]	10mm	7/16 Hex	7/16 Hex
Wheel Size	-	-	-
Maximum rpm	22,000	2,800	2,800
Weight [kg(lbs.)]	0.79 (1.75)	1.02 (2.25)	1.02 (2.25)
Length [mm(in.)]	203 (8)	210 (8.25)	210 (8.25)
Avg. Air Consumption [l/min(CFM)]	368 (13)	368 (13)	368 (13)
Actual Air Consumption [l/min(CFM)]	736 (26)	736 (26)	736 (26)
Air Inlet Thread Size NPTF [in.]	1/4	1/4	1/4
Minimum Hose Size [mm (in.)]	10 (3/8)	10 (3/8)	10 (3/8)
Sound dB(A) Pressure	99.4	98.3	92.2
Vibration m/s ²	4.5	<2.5	<2.5

Listed specifications are for reference only. Please check documents in each tool.

See page 02 for specific test methods



CUTTERS & MISCELLANEOUS TOOLS

CP861 Heavy Duty High Speed Cutter



- Rugged, energy efficient 370W motor
- Lightweight at only 0.74Kg
- Square handle design for positive grip
- Excellent for cutting through sheet metal, fiberglass, bolts, muffler clamps and hangars. Also grinds down burrs and rough edges
- **Max rpm: 20,000**

CP835 Heavy Duty Nibbler



- Rugged nibbling head and 50mm diameter punch cuts steel up to 16 gauge and aluminum up to 10 gauge
- Easy access to punch and die for quick replacement
- Four optional cutting positions
- Perfect for accurate cutting of steel and aluminum. Best for tight corners and circles
- **2,750 strokes per minute**

CP874 Standard Duty High Speed Cutter



- Adjustable speed regulator for precise control
- Lock off throttle to prevent accidental start up
- Rear exhaust directs air away from work area
- Excellent for cutting through sheet metal, fiberglass, bolts, muffler clamps and hangars as well as grinding down burrs and rough edges
- **Max rpm: 22,000**

CP710 Engraving Pen



- Lightweight for easy operation
- Fine point stylus for precise engraving
- Cushion finger grip for comfort
- Low air consumption at only 76 l/mn
- **14,000 strokes per minute**

CP785S Heavy Duty Shear



- Powerful, energy efficient 370W motor
- Triple idler planetary gearing for smooth operation and extended tool life
- Ergonomic handle design for increased comfort
- Heavy duty shear head provides long life and reliable cutting performance up to 18 gauge steel.
- Ideal for cutting squares and angles in materials such as aluminum, tin and steel
- **2,400 strokes per minute**

	CP861	CP874	CP785S	CP835	CP710
Strokes per Minute	–	–	2,400	2,750	14,000
Wheel Diameter	2-7/8	2-7/8	–	–	–
Max rpm	20,000	22,000	–	–	–
Weight [kg (lbs.)]	0.74 (1.63)	0.79 (1.75)	0.86 (2.5)	0.59 (2.25)	0.5 (1.13)
Length [mm (in.)]	197 (7.75)	184 (7.25)	229 (8.25)	216 (7.5)	133 (5.25)
Avg. Air Consumption [l/min (CFM)]	241 (8.5)	354 (12.5)	142 (15.5)	156 (17)	76 (2.7)
Air Inlet Thread Size NPTF [in.]	1/4	1/4	1/4	1/4	1/4
Minimum Hose Size [mm (in.)]	10 (3/8)	10 (3/8)	10 (3/8)	10 (3/8)	6 (1/4)
Sound dB(A) Pressure	89.2	99	94.4	96.5	65
Vibration m/s ²	2.8	4	3.2	5.4	10.5

See page 02 for specific test methods

Listed specifications are for reference only. Please check documents in each tool.

A black and white photograph of a hand holding an air drill. The hand is positioned on the right side of the frame, gripping the handle of the drill. The drill is oriented vertically, with its chuck and drill bit pointing downwards. The background is dark and out of focus, suggesting an industrial or workshop environment. The lighting highlights the contours of the hand and the metallic parts of the drill.

Air Drills

We have expanded our line of high quality air drills with chucks designed to resist wear and tear. Made for comfort with compact size, light weight and ergonomic design. Tough enough for precision drilling, honing, reaming and hole sawing.



AIR DRILLS

CP7300 6mm Mini Air Drill



- General purpose non-reversible drill Fast at 2,800 rpm
- Compact and lightweight for easy handling
- Ergonomic grip for comfort and control
- Jacob's chuck 6mm capacity
- Planetary gearing with brass bushings for low wear and long life
- Adjustable exhaust
- Excellent for drilling, honing, reaming and hole sawing
- **Free Speed: 2,800 rpm**

CP7300R

6mm Reversible Mini Drill

- General purpose, reversible drill. 2,700 rpm
- Compact and lightweight for easy handling
- Planetary gearing with brass bushings
- Jacobs Chuck 6mm capacity
- **Free Speed: 2,700 rpm**

CP7300RQC

6mm Reversible Mini Drill

- Same great features as the CP7300R with a keyless chuck.

CP784 10mm Standard Duty Drill



- Compact, streamlined design
- Ergonomic handle with teasing throttle for precise control
- Adjustable exhaust
- Ideal for accessory and air conditioner installation and auto body repair
- **Free Speed: 2,600 rpm**

CP7301/CP7302 10mm Slimline Duty Drill



- General purpose, non-reversible drills
- Compact and lightweight for easy handling
- Planetary gearing with precision bearings
- Keyless Chuck 10mm
- **Free Speed: 4,300 and 2,500 rpm**

* Europe Only

CP785 10mm Standard Duty Drill



- Powerful energy efficient air motor resists stalls
- Triple idler planetary gearing for smooth operation and extended tool life
- Handle exhaust reduces noise and directs air away from work area
- Ideal for accessory and air conditioner installation, engine work and auto body repair
- **Free Speed: 2,400 rpm**

CP785QC

10mm Standard Duty Drill






- Same great features as the CP785 plus a Quick Change chuck for fast bit changing
- **Free Speed: 2,400 rpm**

	CP7300	CP7300R	CP7301	CP7302	CP784	CP785	CP785QC
Chuck Size [mm (in.)]	6 (1/4)	6 (1/4)	10 (3/8)	10 (3/8)	10 (3/8)	10 (3/8)	10 (3/8)
Spindle Size [mm (in.)]	24 (3/8)	24 (3/8)	24 (3/8)	24 (3/8)	24 (3/8)	24 (3/8)	24 (3/8)
Free Speed [rpm]	2,800	2,700	4,300	2,500	2,600	2,400	2,400
Weight [Kg(lbs.)]	0.61 (1.35)	0.61 (1.35)	0.9 (1.35)	0.9 (1.35)	0.68 (1.5)	1.02 (2.25)	1.02 (2.25)
Length [mm (in.)]	127 (5)	127 (5)	216 (8.5)	216 (8.5)	216 (8.5)	178 (7)	178 (7)
Avg. Air Consumption [l/min(CFM)]	116 (4.1)	116 (4.1)	9.3	9.3	166 (5.85)	117 (4.13)	85 (3)
Air Inlet Thread Size NPTF [in.]	1/4	1/4	1/4	1/4	1/4	1/4	1/4
Minimum Hose Size [mm (in.)]	10 (3/8)	10 (3/8)	10 (3/8)	10 (3/8)	10 (3/8)	10 (3/8)	10 (3/8)
Sound dB(A) Pressure	86	86	-	-	92	96.8	90
Vibration m/s ²	<2.5	<2.5	-	-	<2.5	2.5	<2.5

See page 02 for specific test methods

Listed specifications are for reference only. Please check documents in each tool.



CP879 10mm Reversible Angle Drill 	<ul style="list-style-type: none"> • Compact, low profile head for confined areas • Reverse valve for easy directional changes • Teasing throttle for control from start up through run down • Ideal for screwdriving and drilling in hard to reach areas • Free Speed: 1,800 rpm 	CP789R-26 10mm Super Duty Reversible Drill 	<ul style="list-style-type: none"> • Teasing throttle for precise control • Oil free operation • Needle bearing gearing for improved durability • Applications include screwdriving, honing and heavy drilling • Free Speed: 2,600 rpm CP789R-42 10mm Super Duty Reversible Drill <ul style="list-style-type: none"> • Teasing throttle for precise control • Oil free operation • Needle bearing gearing for improved durability • Great tool for small hole drilling and aluminum work • Free Speed: 4,200 rpm
CP887 10mm Straight In-Line Drill 	<ul style="list-style-type: none"> • Jacobs Chuck 10mm capacity • Built-in regulator • Lock off throttle to prevent accidental start up • Perfect for drilling in hard to reach areas • Free Speed: 2,700 rpm 	CP789HR 13mm Super Duty Reversible Drill 	<ul style="list-style-type: none"> • Teasing throttle for precise control • Needle bearing gearing for improved durability • The right tool for heavy drilling, reaming, hole sawing and jobs requiring a lot of torque • Free Speed: 500 rpm
CP785H 13mm Standard Duty Drill 	<ul style="list-style-type: none"> • Teasing throttle for precise control • Triple planetary gearing for smooth operation and extended life • Side handle for added comfort and control • Perfect for drilling, hole sawing and cylinder honing • Free Speed: 500 rpm 		

	CP879	CP887	CP785H	CP789R-26	CP789R-42	CP789HR
Chuck Size [mm (in.)]	10 (3/8)	10 (3/8)	13 (1/2)	10 (3/8)	10 (3/8)	13 (1/2)
Spindle Size [mm (in.)]	24 (3/8)	24 (3/8)	24 (3/8)	24 (3/8)	24 (3/8)	24 (3/8)
Free Speed [rpm]	1,800	2,700	500	2,600	4,200	500
Weight [kg (lbs.)]	1.02 (2.25)	1.02 (2.25)	1.36 (3)	1.13 (2.5)	1.13 (2.5)	1.47 (3.25)
Length [mm (in.)]	210 (8.25)	203 (8)	197 (7.75)	178 (7)	178 (7)	203 (8)
Avg. Air Consumption [l/min (CFM)]	149 (5.25)	191 (6.75)	85 (3)	212 (7.5)	212 (7.5)	212 (7.5)
Air Inlet Thread Size NPTF [in.]	1/4	1/4	1/4	1/4	1/4	1/4
Minimum Hose Size [mm (in.)]	10 (3/8)	10 (3/8)	10 (3/8)	10 (3/8)	10 (3/8)	10 (3/8)
Sound dB(A) Pressure	94.9	99	96.3	96.2	100.1	96.3
Vibration m/s ²	<2.5	<2.5	<2.5	<2.5	<2.5	<2.5

Listed specifications are for reference only. Please check documents in each tool.

See page 02 for specific test methods





Air Hammers

Air hammers have to take on some of the toughest jobs in the shop, and these are up to the task. CP air hammers are designed for cutting, punching, chipping and scraping. Whether its muffler and pipe removal, body shop and shop work, bushing driving, shearing or front end work. Our unique combination of power and control gets the job done.



CP7110 Heavy Duty Air Hammer



Reduced Vibration



- Powerful, yet economical for fast cutting action
- Vibration isolation system for smoother operation and greater comfort
- Unique cushioned exhaust deflector on barrel for comfort and control
- Touch trigger for precision start ups and total control
- Ideal for exhaust system work, bolt cutting, bushing driving, shearing and front end work
- **Blows per minute: 3,200**

CP7110K

Heavy Duty Air Hammer Kit

Kit includes CP7110 air hammer plus a posi-lock retainer and four chisels packed in a heavy duty carrying case

CP714 Super Duty Air Hammer



- Positive action trigger for precise control over speed range
- Versatile, handling a wide range of body shop applications including front end, exhaust, frame and body work
- **2,000 blows per minute**

CP714K

Super Duty Air Hammer Kit

Kit includes CP714 air hammer plus a four piece chisel set packed in a heavy duty carrying case

CP711 Standard Duty Air Hammer



- Powerful, yet economical, for fast cutting action
- Designed for exhaust pipe removal, body shop, scraping rust and light front-end work
- Quick-Change retainer for fast and easy accessory changes
- **3,500 blows per minute**

CP711K

Standard Duty Air Hammer Kit

Kit includes CP711 plus four piece chisel set packed in a heavy duty carrying case

CP711Hex

Standard Duty Air Hammer


Same great features as the CP711 with a hexagon bushing.

CP711Hex Kit

Standard Duty Air Hammer Kit

Kit includes CP711 Hex plus four piece chisel set packed in a heavy duty carrying case

CP715 Heavy Duty Air Hammer



- Most powerful hammer in its class
- Longer piston strokes for more force per blow
- Integral muffler minimizes exhaust sound
- Ideal for bolt and rivet shearing, bushing driving and overall front end work
- **2,100 blows per minute**

CP715K

Heavy Duty Air Hammer Kit

Kit includes CP715 air hammer plus a four piece chisel set packed in a heavy duty carrying case

	CP7110	CP711	CP714	CP715
Shank Opening [in.]	.401	.401	.401	.401
Bore Diameter [mm (in.)]	19 (3/4)	19 (3/4)	14 (9/16)	19 (3/4)
Piston Stroke [mm (in.)]	67 (2.63)	67 (2.63)	80 (3.13)	89 (3.50)
Weight [kg (lbs.)]	1.7 (3.7)	1.59 (3.5)	1.51 (3.33)	2.04 (4.5)
Avg. Air Consumption [l/min (CFM)]	106 (3.5)	96 (3.4)	60 (2.13)	99 (3.5)
Air Inlet Thread Size NPTF [in.]	1/4	1/4	1/4	1/4
Minimum Hose Size [mm (in.)]	10 (3/8)	10 (3/8)	10 (3/8)	10 (3/8)
Sound dB(A) Pressure	98.3	105	91	109
Vibration m/s ²	9	15.2	7.5	13.7
Blows per minute [@90 PSI (@6.2 Bar)]	3,200	3,500	2,000	2,100

Listed specifications are for reference only. Please check documents in each tool.

See page 02 for specific test methods



AIR HAMMERS

CP7120 Needle Scaler



- General purpose needle scaler
- Ideal for surface preparation work
- Adjustable sleeve to fit the protrusion of the needles to the task to be performed
- 19 x 3mm steel needles with high resistance to wear
- Easily converts into a chisel scaler
- **Blows per minute: 4,800**

CP716 Heavy Duty Air Hammer



- Powerful with teasing trigger for precise control
- Single piece barrel for easy maintenance
- Quick Change retainer for fast and simple accessory changes
- Designed for cutting, bushing, driving, body shop and front end work
- **Blows per minute: 3,500 rpm**

CP717 Super Duty Air Hammer



- Most powerful CP air hammer for automotive, truck and off-road equipment
- Positive action trigger for precise control
- Ideal for front end work, king pin removal and installation of bulldozer walking beams, removal of truck springs and heavy duty spring bushings
- **Blows per minute: 1,800 rpm**



CP717K
Super Duty Air Hammer Kit
 Kit includes CP717 air hammer plus a four piece chisel set packed in a heavy duty carrying case

	CP7120	CP716	CP717
Shank Opening [in.]	-	.401	.498
Bore Diameter [mm (in.)]	25 (1)	19 (3/4)	19 (3/4)
Piston Stroke [mm (in.)]	28.35 (1.18)	58 (2.28)	68 (2.69)
Weight [kg (lbs.)]	2.8 (6.2)	1.59 (3.5)	2.15 (4.75)
Avg. Air Consumption [l/min (CFM)]	113 (4)	99 (3.5)	89 (3.13)
Air Inlet Thread Size NPTF [in.]	1/4	1/4	1/4
Minimum Hose Size [mm (in.)]	10 (3/8)	10 (3/8)	10 (3/8)
Sound dB(A) Pressure	95	103	95
Vibration m/s ²	9.7 (15.6w/ chisel adapter)	18.5	13
Blows per minute [@90 PSI/@6.2 Bar]	4,800	3,500	1,800

See page 02 for specific test methods

Listed specifications are for reference only. Please check documents in each tool.





Air Screwdrivers

We offer a full range of air screwdrivers for general repair and body shops with a variety of handle styles, speeds and torque adjustments to handle the toughest jobs.



AIR SCREWDRIVERS

CP780 Air Screwdriver



- Cushion clutch with external clutch adjustment
- Built-in quick change chuck
- Convenient forward/reverse valve
- Ideal for general repair and body shop work
- **Free Speed: 1,800 rpm**

CP781 Air Screwdriver



- Cushion clutch with external clutch adjustment
- Built-in quick change chuck
- Convenient forward/reverse valve
- Ideal for general repair and body shop work
- **Free Speed: 800 rpm**

CP782 Air Screwdriver



- Cushion clutch with external clutch adjustment
- Built-in quick change chuck
- Convenient forward/reverse valve
- Ideal for general repair and body shop work
- **Free Speed: 1,800 rpm**

CP783 Air Screwdriver



- Cushion clutch with internal clutch adjustment
- Compact design for easy handling
- Magnetic bit holder
- Ideal for general repair and body shop work
- **Free Speed: 2,000 rpm**

	CP780	CP781	CP782	CP783
Chuck Size [in.]	1/4, Fem Hex QC	1/4, Fem Hex QC	1/4, Fem Hex QC	1/4, Fem Hex QC
Free Speed [rpm]	1,800	800	1,800	2,000
Minimum Torque [Nm (in.lbs)]	2.83 (25)	2.83 (25)	3.5 (31)	1.13 (10)
Maximum Torque [Nm (in.lbs)]	4.97 (44)	8.47 (75)	4.97 (44)	2.83 (25)
Weight [kg (in.)]	1.13 (2.5)	1.36 (3)	1.13 (2.5)	0.6 (1.33)
Length [mm (in.)]	210 (8.25)	226 (8.88)	245 (9.63)	226 (8.88)
Actual Air Consumption [l/min (CFM)]	453 (16)	453 (16)	453 (16)	453 (16)
Air Inlet Thread Size NPTF [in.]	1/4	1/4	1/4	1/4
Minimum Hose Size [mm (in.)]	10 (3/8)	10 (3/8)	10 (3/8)	10 (3/8)
Sound dB(A) Pressure	98.3	99.5	93.9	88.1
Vibration m/s ²	2.7	3	17	4.4

Listed specifications are for reference only. Please check documents in each tool.

See page 02 for specific test methods



Air Riveters

Our air hydraulic riveters are designed for efficiency, manoeuvrability and easy handling.



AIR RIVETERS

CP883 Air Hydraulic Riveter



- Vacuum assist system designed for greater efficiency in downward riveting
- Cylinder cap with storage area for spare nose pieces
- Universal air inlet swivel to allow greater maneuverability
- Three piece jaw set designed from the highest quality materials
- Rubber boot protects tool and work surface
- Comes complete with 1/8", 5/32" and 3/16" nose pieces
- **Capacity: 3/16"**

CP884 Air Hydraulic Riveter



- Vacuum assist system designed for greater efficiency in downward riveting
- Cylinder cap with storage area for spare nose pieces
- Universal air inlet swivel to allow greater manoeuvrability
- Three piece jaw set designed from the highest quality materials
- Rubber boot protects tool and work surface
- Comes complete with 3/16" and 1/4" nose pieces
- **Capacity: 1/4"**

	CP883	CP884
Traction Power [kg-mm (lb-ft)]	1.985 (4.375)	1.796 (3.960)
Rivet Capacity [mm (in.)]	5 (3/16)	6 (1/4)
Stroke Length [mm(in.)]	17 (11/16)	22 (7/8)
Weight [kg (lbs.)]	1.81 (4)	2.49 (5.5)
Actual Air Consumption [l/min (CFM)]	283 (10)	566 (20)
Air Inlet Thread Size NPTF [in.]	1/4	1/4
Minimum Hose Size [mm (in.)]	10 (3/8)	10 (3/8)
Sound dB(A) Pressure	<85	<85
Vibration m/s ²	<2.5	<2.5



ACCESSORIES

Chicago Pneumatic offers a full line of accessories.

The selection of high quality accessories available ensure that you get the performance you expect from your Chicago Pneumatic power tool.



IMPACT SOCKET SETS

CP's new line of premium, high performance sockets combine strength, durability, looks and top quality. From the tough, chromemoly steel construction to the laser etched, easy to read socket size, these are the only impact sockets you'll ever need.



PART NUMBER	DESCRIPTION	REF.NO.	PART NUMBER	DESCRIPTION	REF.NO.
8940158996	7 pc 3/8" DR. METRIC UNIVERSAL 10, 12, 13, 14, 15, 17, 19mm	S3107U	8940159002	7 pc 1/2" DR. METRIC UNIVERSAL 10, 12, 13, 14, 15, 17, 19mm	S4107U
8940158989	8 pc 3/8" DR. METRIC 9, 10, 12, 13, 14, 15, 17, 19mm	S3108	8940158998	14 pc 1/2" DR. METRIC 10, 11, 12, 13, 14, 15, 16, 17, 18, 19, 21, 22, 26, 27mm	S4114
8940158993	8 pc 3/8" DR. DEEP METRIC 9, 10, 12, 13, 14, 15, 17, 19mm	S3108D	8940159000	14 pc 1/2" DR. DEEP METRIC 10, 11, 12, 13, 14, 15, 16, 17, 18, 19, 21, 22, 26, 27mm	S4114D
8940158994	13 pc 3/8" DR. DEEP METRIC 7, 8, 9, 10, 11, 12, 13, 14, 15, 16, 17, 18, 19mm	S3113D	8940159008	11 pc 3/4" DR. DEEP METRIC 17, 19, 21, 27, 30, 32, 33, 35, 36, 38, 41mm	S6111D
8940158988	12 pc 3/8" DR. SAE/METRIC 5/16", 3/8", 7/16", 1/2", 9/16", 5/8", 10, 12, 14, 15, 17, 19mm	S3312	8940159012	9 pc 1" DR. METRIC 26, 27, 29, 30, 32, 33, 35, 36, 38mm	S8109
8940158992	12 pc 3/8" FR. DEEP SAE/METRIC 5/16", 3/8", 7/16", 1/2", 9/16", 5/8", 10, 12, 14, 15, 17, 19mm	S3312D	8940162334	6PC 1" DR. DEEP METRIC 24,27,30,32,33,36mm	S8106D
			8940162335	3PC 1/2" DR. DEEP METRIC THINWALL 17,19,21mm	S4104D



ACCESSORIES

IMPACT SOCKETS



3/8" SQUARE DRIVE DEEP

Number	Size	Ref No
8940161931	7mm	S1307MD
8940161932	8mm	S1308MD
8940161933	9mm	S1309MD
8940161934	10mm	S1310MD
8940161935	11mm	S1311MD
8940161936	12mm	S1312MD
8940161937	13mm	S1313MD
8940161938	14mm	S1314MD
8940161939	15mm	S1315MD
8940161940	16mm	S1316MD
8940161941	17mm	S1317MD
8940161942	18mm	S1318MD
8940161943	19mm	S1319MD

3/8" SQUARE DRIVE STANDARD

Number	Size	Ref No
8940161915	9mm	S1309M
8940161916	10mm	S1310M
8940161917	11mm	S1311M
8940161918	12mm	S1312M
8940161919	14mm	S1314M
8940161920	15mm	S1315M
8940161921	17mm	S1317M
8940161922	19mm	S1319M

3/8" SQUARE DRIVE UNIVERSAL

Number	Size	Ref No
8940161972	10mm	S1310MU
8940161973	12mm	S1312MU
8940161974	13mm	S1313MU
8940161975	14mm	S1314MU
8940161976	15mm	S1315MU
8940161977	17mm	S1317MU
8940161978	19mm	S1319MU

1/2" SQUARE DRIVE DEEP

Number	Size	Ref No
8940161861	10mm	S1410MD
8940161862	11mm	S1411MD
8940161863	12mm	S1412MD
8940161864	13mm	S1413MD
8940161865	14mm	S1414MD
8940161866	15mm	S1415MD
8940161867	16mm	S1416MD
8940161868	17mm	S1417MD
8940161869	18mm	S1418MD
8940161870	19mm	S1419MD
8940161871	21mm	S1421MD
8940161872	22mm	S1422MD
8940161873	26mm	S1426MD
8940161874	27mm	S1427MD

1/2" SQUARE DRIVE STANDARD

Number	Size	Ref No
8940161888	10mm	S1410M
8940161889	11mm	S1411M
8940161890	12mm	S1412M
8940161891	13mm	S1413M
8940161892	14mm	S1414M
8940161893	15mm	S1415M
8940161894	16mm	S1416M
8940161895	17mm	S1417M
8940161896	18mm	S1418M
8940161897	19mm	S1419M
8940161898	21mm	S1421M
8940161899	22mm	S1422M
8940161900	26mm	S1426M
8940161901	27mm	S1427M

1/2" SQUARE DRIVE UNIVERSAL

Number	Size	Ref No
8940161986	13mm	S1413MU
8940161987	14mm	S1414MU
8940161988	15mm	S1415MU
8940161989	17mm	S1417MU
8940161990	19mm	S1419MU
8940161991	21mm	S1421MU
8940161992	22mm	S1422MU

1/2" SQUARE DRIVE FLIP

Number	Nut Size	Ref No
8940162069	17mm x 19mm	S1417MF
8940162070	19mm x 21mm	S1419MF

3/4" SQUARE DRIVE DEEP

Number	Nut Size	Ref No
8940162027	17mm	S1617MD
8940162028	19mm	S1619MD
8940162029	21mm	S1621MD
8940162030	27mm	S1627MD
8940162031	30mm	S1630MD
8940162032	32mm	S1632MD
8940162033	33mm	S1633MD
8940162034	35mm	S1635MD
8940162035	36mm	S1636MD
8940162036	38mm	S1638MD
8940162037	41mm	S1641MD


1" SQUARE DRIVE STANDARD

Number	Nut Size	Ref No
8940162047	26mm	S1826M
8940162048	27mm	S1827M
8940162049	29mm	S1829M
8940162050	30mm	S1830M
8940162051	32mm	S1832M
8940162052	33mm	S1833M
8940162053	35mm	S1835M
8940162054	36mm	S1836M
8940162055	38mm	S1838M



SANDING PADS

For CP766



New longer length, helps prevent paper breakage. Accepts multiple paper loading for less paper changing time.

KF-125126 3 2/3" x 9"

For CP767 & CP768



Molded edge pad with dimple free surface prevents grit buildup for a smooth finish. Accepts pressure-sensitive adhesive or standard sandpaper.

KF-125457 2 3/4" x 17 1/2"

For CP778



KF-137216 3" Back-up Pad
KF-137215 4" Back-up Pad
KF-137214 5" Back-up Pad

For CP865 and CP869



Flexible edge sanding pad

KF-129587 7" Pad & Nut
KF-129586 Locknut Only

5/8"-11 N.C. THD.

SANDING PADS



Heavy duty pad, aluminum backed with flexible molded edge for smooth feather edging.

8940158690 150mm (6") Velcro Pad 6 holes
8940158621 150mm (6") PSA Pad 6 holes
8940158689 150mm (6") Velcro Pad
8940158351 150mm (6") PSA Pad
8940158352 Pad Spanner 26mm
KF140658 150mm (6") PSA Pad
CA149405 150mm (6") Velcro Pad
CA142413 150mm (6") PSA Pad 6 Hole Dust Ext
CA149784 150mm (6") Velcro Pad 6 Hole Dust Ext

Spindle 5/16 - 24

REINFORCED RESINOID WHEEL

For CP861 & CP874



Package of 5 wheels

CA-155312 3 x 1/16" x 3/8"

SANDING BELTS

For CP858 (Package of 5 belts 10mm x 330mm)



CA-156714 60 Grit
CA-156722 80 Grit
CA-156735 120 Grit

MINI SANDER/POLISHER PADS & PAPER

For CP7200S & CP7202D

8940158677	50mm 320 Grit (50 Pieces)	CP7200S
8940158678	50mm 400 Grit (50 Pieces)	CP7200S
8940158679	50mm 600 Grit (50 Pieces)	CP7200S
8940158680	75mm 320 Grit (50 Pieces)	CP7200S
8940158681	75mm 400 Grit (50 Pieces)	CP7200S
8940158682	75mm 600 Grit (50 Pieces)	CP7200S
8940161712	75mm Sanding Disc 60 Grit (5 Pieces)	CP7202D
8940161713	75mm Sanding Disc 80 Grit (5 Pieces)	CP7202D
8940161714	75mm Sanding Disc 100 Grit (5 Pieces)	CP7202D
8940161715	75mm Sanding Disc 120 Grit (5 Pieces)	CP7202D
8940161716	75mm Surface Prep Pad (fine) (5 Pieces)	CP7202D
8940161717	75mm Surface Prep Pad (medium) (5 Pieces)	CP7202D
8940161718	75mm Surface Prep Pad (course) (5 Pieces)	CP7202D

SANDER TUNE-UP KITS



KF-132237 CP864 A & B
KF-132239 CP865 A & B
KF-132241 CP766 & CP866 B

REAR EXHAUST HOSE ASSEMBLY

REAR EXHAUST HOSE ASSEMBLY CA-127175



Includes:

CA-046270 6' Whip Hose
KF-127210 5' Exhaust Overhose
KF-127211 Attachment Ferrule

POLISHING PADS

For CP865P, CP869P & CP7201P



KF125423	203mm Polishing Pads	CP865P/CP869P
KF129587	Pad Assembly	CP865P/CP869P
CA158108	77mm Soft Polishing Pads	CP7201P White
CA158109	77mm Hard Polishing Pads	CP7201P Yellow
CA158110	77mm Buffing Pads	CP7201P White
8940158772	50mm Soft Polishing Pads	CP7201P White
8940158773	50mm Hard Buffing Pads	CP7201P Yellow
8940158774	50mm Buffing Pads	CP7201P Wool
8940158546	Backing Pad	CP8120E
8940158547	Foam Pad - Soft	CP8210E
8940158548	Foam Pad - Hard	CP8210E
8940158549	Polishing Foam	CP8210E



ACCESSORIES

BATTERIES AND CHARGERS



One Hour Charge

PART NUMBER	DESCRIPTION	
6153963670	Euro charger	CP8730/CP8740/CP8745 Models E+N
6153963680	UK charger	CP8730/CP8740/CP8745 Models N
8940158966	14.4 Volt battery Ni-cad	CP8730/CP8740 Models E+N
8940158967	14.4 Volt battery Ni-Mh	CP8730/CP8740 Models N
8940158968	18 Volt battery Ni-cad	CP8745 E+N
8940158968	18 Volt battery Ni-Mh	CP8745 N

COLLET ADAPTER



For any 1/4" Collet Die Grinder

Allows use of 1/8" shank burrs.

C-123029

GRINDER ACCESSORIES

PART NUMBER	DESCRIPTION	
C-136898	4" Guard	
C-137312	4" Depressed Center Grinding Wheel	
KF141860	5" Guard	
C-138512	Wheel Collar	
C-136926	Spanner	
C-136927	Wheel Nut Wrench	

SAW BLADES

PART NUMBER	DESCRIPTION	
CA-146719	18T Saw blades (5pcs)	CP7900
CA-146720	24T Saw blades (5pcs)	CP7900
CA-146721	32T Saw blades (5pcs)	CP7900
8940158775	18T Saw blades (5pcs)	CP7901
8940158776	24T Saw blades (5pcs)	CP7901
8940158777	32T Saw blades (5pcs)	CP7901


BURRS, MOUNTED WHEELS & RASPS



C-056721	C-056722	KF-137769 Pencil	KF-137770 Ball	KF-137771 Barrel	KF-137772 Pencil
----------	----------	---------------------	-------------------	---------------------	---------------------

1/4" CARBIDE BURRS

1/4" CARBIDE RASPS



C-085067 38,050 rpm	C085068 50,050 rpm	C-085074 31,070 rpm	C-085075 32,950 rpm	C-085070 27,780 rpm	C-085069 35,510 rpm
------------------------	-----------------------	------------------------	------------------------	------------------------	------------------------

GENERAL PURPOSE MOUNTED WHEELS

SCREWDRIVER KIT



For use with all Air Drills.
Has Quick-Change
Slip Chuck, three
Phillips Bits and two
Slotted Bits.

CA-155826

THREAD-MOUNTED JACOBS® DRILL CHUCKS



JACOBS CHUCKS	PART NUMBER	CAPACITY mm	THREAD MOUNT	KEY PART NO. (JACOBS)		KEYHOLDER
7B 2B Multicraft	CA-050073	0-6	3/8-24	CA-050119	K7	CA-050165
	CA-050082	0-10	2/8-24	CA-050121	K2	CA-050166
	KF-124595	0-10	3/8-24	CA-121582	KGA	CA-050165
22BA 33B 33B	C-142408	1-10	3/8-24	CA-050120	K30	CA-050165
	CA-050090	1-13	1/2-20	C-142411	KK	CA-050165
	S-066095	1-13	3/8-24	CA-050122	K32	CA-050166
24BA	C-142407	0-13	3/8-24	CA-050122	K32	CA-050166
J10	CA-146490	0-10	3/8-24	C-142411	K32	CA-050166
	8940162272	0-6	3/8-24	KEYLESS		

IMPACT PROTECTOR COVERS

IMPACT WRENCH TUNE-UP AND REPAIR KITS

PVC CUSHION-COAT PROTECTOR COVERS

TOOL NUMBER	PART NUMBER
CP724, CP726	CA-146522
CP731, CP731-2, CP733, CP733-2	CA-146523
CP734H	CA-129405
CP746	CA-126071
CP741, CP741-2	8940158676
CP749, CP749-2	C-155537
CP772H	CA-124745
CP776	CA-154948
CP797	CA-139818
CP7733, CP7733-2	8940158949
CP7750, CP7750-2	8940158793
CP7775, CP7775-6	8940162416

IMPACT WRENCH TUNE-UP AND REPAIR KITS

TOOL NUMBER	TUNE-UP KIT	REPAIR KIT
CP719	CA-157285	CA-157286
CP720 B, C & D	CA-051509	
CP721 B & C	CA-118880	
CP722 A	CA-146000	
CP724	CA-155218	CA-155310
CP726	CA-155309	CA-155311
CP727	CA-157295	CA-157296
CP731 A	CA-145503	CA-145592
CP731-2 A	CA-145503	CA-145604
CP733	CA-155125	CA-155126
CP733-2	CA-158028	CA-155127
CP734H	CA-155125	CA-147717
CP741	CA-147716	CA-158033
CP741-2	CA-158028	CA-158029
CP744 A	CA-126991	
CP744 B	CA-126991	KF-138154
CP746	KF-144043	KF-144041
CP746-2	KF-144043	KF-144042
CP749 A, B & C	CA-148616	CA-155966
CP749 D	8940158635	8940158636
CP749-2 A, B & C	CA-148616	CA-155967
CP749 D	8940158635	8940158637
CP770	CA-157374	CA-157375
CP770-6	CA-157374	CA-157376
CP771	CA-157374	CA-157377
CP771-6	CA-157374	CA-157378
CP772 A & B	CA-053902	KF-137832
CP772H	CA-149746	CA-149747
CP775	CA-145357	
CP776	CA-149158	CA-149159
CP776-6	CA-149158	CA-149160
CP796	CA-126992	CA-149159
CP893	CA-146649	CA-149160
CP894	CA-149855	
CP898, CP898-6	CA-157909	
CP897, CP897-6	CA-145228	
CP5000	CA-148687	
CP7733	8940158860	8940158861
CP7733-2	8940158860	8940158862
CP7750 A & B	8940158371	8940158372
CP7750-2 A & B	8940158371	8940158373
CP7775	8940162206	

ACCESSORIES FOR RATCHETS

TOOL NUMBER	TUNE-UP KIT	REPLACEMENT HEAD	PROTECTIVE COVER
CP824	CA157871	CA157872	CA157928
CP824T	CA157871	CA157873	CA157928
CP824 A/B/C/L & K	CA155091	CA155090	CA140128
CP825T	CA155091	CA155903	CA140128
CP826	CA155033	CA155034	CA154993
CP826T	CA155033	CA155035	CA154993
CP828D/N & E	CA155086	CA155084	CA133961
CP828 C & M		KF136176	CA133961
CP828H D/N & E	CA155086	CA155085	CA133961
CP828H A & K		CA155085	CA133961
CP830	CA148608	CA155084	CA147993
CP830H	CA148068	CA155085	CA147993
CP886	CA146437	CA146436	CA133961
CP886H	CA146437	CA147668	CA133961
CP7830, CP7830Q	8940158552	8940158613	CA147993
CP7830H	8940158552	8940158614	CA147993




ACCESSORIES

It is strongly recommended that you install a Chicago Pneumatic Filter, Regulator and Lubricator between the air supply and every air tool. By installing these accessories, the life of the air tool is greatly increased. The separator traps the moisture before it enters the air tool. The pressure regulator can be adjusted so that the correct air pressure enters the tool while high pressures are maintained at the compressor. The line lubricator allows the proper amount of lubrication needed for top performance.

CP FILTER, REGULATOR & LUBRICATOR

FILTER/MOISTURE SEPARATOR – PRESSURE REGULATOR LINE LUBRICATOR

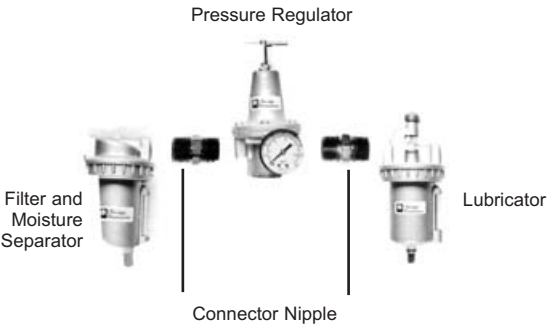

Description		Part No.
Filter/Moisture Separator*	1/2" LINE SIZE	CA-048360
Line Lubricator*		CA-048361
Pressure Regulator		CA-048362
Connector Nipple		CA-048363
Replacement Bowl for Separator and Lubricator		C-108182

*Maximum Rating 250 psi.

GREASE GUN



3 Ounce Capacity
Uses Molybased Clutch Grease
(Part Number 8940158456) 14 oz.

C098689

QUICK-CHANGE COUPLERS



NOTE: Numbers in parentheses indicate mfg. identification stamped on couplers.

Coupler Size	CFM*	Thread Size In.	Coupler Body FPT	Nipple FPT	Nipple MPT
6	31	1/4"	CA-046300 (13)	CA-046301 (3c)	CA-046302 (2c)
9	70	1/4"	CA-047300 (15c)	CA-047302 (1e)	CA-047303 (0e)
9	70	3/8"	CA-047301 (15)	CA-047304 (3e)	CA-047305 (2e)
12,5	125	3/8"	CA-049300 (17e)	CA-049302 (1f)	CA-049303 (0f)
12,5	125	1/2"	CA-049301 (17)	CA-049304 (3f)	CA-049305 (2f)

*Recommended working CFM - 30% of maximum flow (ASME power test)

AIR FLOW REGULATORS

CP711, CP714, CP717 ECONOMY FLOW REGULATOR



- LC-121737
- Attaches to all air tools with 1/4" NPTF air inlet thread size.
- Provides quick regulation of air flow.

CP711, CP714, CP715, CP717 HEAVY-DUTY FLOW REGULATOR



- CA-085203
- Very fine control over entire range.
- Corrosion resistant bronze construction 1/4" NPTF.
- Positive jaw lock prevents vibration-induced

HOSE WHIPS MALE ENDS



Always use a hose whip between the tool and the air supply hose. It provides safety and longer tool air inlet life.

Hose Dia. in.	Thread Size in.	Hose Lgth. cm (ft.)	Part No.
6	1/4"	183 (6)	CA-046270
9	1/4"	61 (2)	CA-047270
9	1/4"	183 (6)	CA-047271
12,5	3/8"	91.5 (3)	CA-049271
12,5	1/2"	61 (2)	CA-049270

AIR TOOL LUBRICANTS

AIROILENE OIL		PNEU-LUBE CLUTCH GREASE			PROTECTO-LUBE	
High refined oil for use in lean tools. Use in air line lubricators and in integral oil reservoirs provided on some tools.		Synthetic grease, specially formulated to extend the life of your CP impact wrench clutches.			Cleans out gum and deposits in air tools.	
Part No.	Amount	Part No.	Amount	Part No.	Amount	
P-089507	1 gal.	8940158455	103 cc (3.5 oz.)	8940158457	7 lb.	CA-000046 591 cc (20 oz.)
						CA-149661 118 cc (4 oz.)



HAMMER ACCESSORIES FOR .401" SHANK HAMMERS



Index No.	Part No.	Length mm	Description
1	A-046050	165	Rivet Cutter
2	A-046063	178	Angle Scaling Chisel
3	A-046064	178	Diamond Point Chisel
4	A-046071	165	Twin Blade Panel (pipe) Cutter
5	A-046073	178	Cold Chisel
6	A-046074	178	Straight Punch
7	A-046075	178	Spot Weld Splitter
8	A-046078	178	Tapered Punch
9	A-046094	—	Zip-Quick Retainer
10	A-046095	—	Quick-Change Retainer
11	A-046096	—	Bee-Hive Retainer
12	A-121721	—	Posi-Lok Retainer
SET	CA-155807	—	Rivet Cutter, Twin Blade Cutter, Cold Chisel, Straight Punch, Tapered Punch

HAMMER ACCESSORIES FOR .498" SHANK HAMMERS



Index No.	Part No.	Length mm	Description
1	A-047050	165	Rivet Cutter
2	A-047051	178	Wide Cutting Chisel
3	A-047052	178	Bushing Splitter
4	A-047057	178	Universal Joint & Tie Rod Tool
5	A-047059	178	1" Separator Fork
	A-047060	178	3/4" Separator Fork
	A-047061	178	1-1/4" Separator Fork
6	A-047071	178	Twin Blade Cutter
7	A-047073	165	Cold Chisel
8	A-047074	178	Straight Punch
9	A-047078	178	Tapered Punch
10	A-047091	80	1-1/4" Smoothing Hammer
11	A-047095	—	Quick-Change Retainer
12	A-047096	—	Bee-Hive Retainer

HAMMER ACCESSORIES FOR CP-711HEX HAMMER

Index No.	Part No.	Length mm	Description
1	CA-155778	165	Hex Rivet Cutter
2	CA-155780	178	Hex Angle Scaling Chisel
3	CA-155782	178	Hex Diamond Point Chisel
4	CA-155784	165	Hex Twin Blade Panel (pipe) Cutter
5	CA-155786	178	Hex Cold Chisel
6	CA-155790	178	Hex Straight Punch
7	CA-155792	178	Hex Spot Weld Splitter
8	CA-157107	178	Hex Tapered Punch
SET	CA-155806	—	Rivet Cutter, Twin Blade Cutter, Cold Chisel, Straight Punch, Tapered Punch

ACCESSORIES FOR CP7120

Part No.	Length mm	Description
8940159860	19 x 3	Steel Needles
8940162308	50	Scraper
8940162309	75	Scraper
WP123994	—	Blank
WP123995	6	Diamond Point
WP123996	15.9	Chisel
WP123998	35	Wide
WP123999	35	Angle Scaling

REPAIR CENTRES

FRANCE

Ets Février
10 rue Emile Morlot
02400 Chateau Thierry
Tél / 03.23.84.15.51
Fax / 03.23.84.15.52

ITALY

• **Lombardia**
AIRBLU Snc
Via Tolstoi, 16
20090 Trezzano Sul Naviglio
(MI)
02/48403709

Bissa Eugenio & C. Snc
Via Sempione, 5
24100 Bergamo
035/242828

Marconi Massimo
Via delle Rose, 7
24040 Lallio (BG)
035/6221303

• **Piemonte**
Esa Eettromeccanica
C.so Orbassano 269/e
10137 Torino
011/3096372

Sirap S.a.S.
Via Stampalia, 11
10095 Grugliasco (TO)
011/778359

• **Veneto**
Blu Service S.r.L.
Via Galileo Galilei 1/c
35030 Caselle di Selvazzano
(PD)
049/63220

• **Emilia Romagna**
Italpneumatica S.a.S.
Via Fucini 9/2
40033 casalecchio di Reno
(BO)
051/573000

• **Marche**
Esina Autoattrezzature
Via Gorgolungo, 9
60035 Jesi (AN)
0731/57675

• **Lazio**
Totaro Antonio
Via dei Quinzi, 26
00175 Roma
06/76900328

• **Campania**
MA.DE:S.n.c.
Via Polveriera, 45
80144 Napoli
081/7512486

• **Sardegna**
Cuccu & Sassu & C.
Via Timavo 52
09100 Cagliari
070/28729



GERMANY, SWITZERLAND, AUSTRIA

• Gustav Basser

In der Krim 26
42369 Wuppertal
Telefon: 0202/460120
Telefax: 0202/4601245

• Druckluft-Zentrale

Reuter GmbH
Kirchwaldstraße 9
63533 Mainhausen
Telefon: 06182/22564
Telefax: 06182/26300

• MDD Druckluft GmbH

Herderstraße 6
99510 Apolda
Telefon: 03644/54270
Telefax: 03644/564660

• Ruhland

Druckluft und
Hydrauliktechnik
Auenstraße 6
92718 Schirmitz
Telefon: 0961/419458
Telefax: 0961/419460

• Jürgen Schöffner

Tools & Service
Bahnhofstraße 119
73430 Aalen
Telefon: 07361/969659
Telefax: 07361/969661

• Peter Schlatmann GmbH

Kanalstraße 79-81
44147 Dortmund
Telefon: 0231/820005
Telefax: 0231/822019

Service für Elektrowerkzeuge
ELMAG + Becker
Bahnhofstrasse 30 A
53604 Bad Honnef
Telefon: 02224/5660
Telefax: 02224/71195

• Funke GmbH

Laurenz-Dorrerstraße 6
3300 Amstetten
Österreich
Telefon: ++43/7472/6455024
Telefax: ++43/7472/64596

• Baumgartner AG

Langwiesenstraße 2
8108 Daellikon
Schweiz
Telefon: ++41/1/8476464
Telefax: ++41/1/8476465

GERMANY EXPORT

ASO Celje, D.O.O.
Ipavceva 21
SLO – 3000 Celje
Tel. +386-3-42 60700
Fax.+ 386-3-42 60703

Adria Trgovina Zagreb
Ulica grada Vukovara 222
HR – 10000 Zagreb
Tel. +385-1-6155333
Fax.+385-1-6155222

BetaMAX Kft.
Cscengery u. 53
H – 1067 Budapest
Tel. +36-1-3323157
Fax. +36-1-3326389

Linkamp VT GmbH
Mladost 1 Bl. 89 A1
BG – 1797 Sofia
Tel. +359-2-9713095
Fax. +359-2-9781394

Total Trading s.r.l.
Str. Calea Bucuresti nr. 89A
RO – 77017 Saftica, Judetul
ILFOV
Tel. + 40-21-266 24 06
Fax.+ 40-21-266 25 12

S-A-M Rzuchow
Ul. Rybnicka 77A
PL - 44-285 Rzuchow
Tel. +48-32-4301060
Fax. +48-32-4301061

Lintera
Ukmerges g. 22
LT – 55101 Jonava
Tel. +370-349 61161
Fax +370-349 61297

Homola s.r.o.
Dlhé diely 1/18
SK – 84104 Bratislava
Tel. +421-2-43415450
Fax.+421-2-43415461

Tip Top Inco
Videnska 110
CZ – 61900 Brno
Tel. +420-5-47212666
Fax +420-5-47212669

BENELUX SERVICE CENTRES

HEYMANS LUC
IDDERGEMSTRAAT 3
B- 9470 DENDERLEEuw
TEL 00 32 (0)53/66.45.97
FAX 00 32 (0)53/648745
GSM 00 32 (0)475/39.38.14

LOBET Jean
Avenue du Monument, 20A
B - 6900 MARCHE-ENFAMENNE
Tel 084-31 14 55
Fax 084-31 47 04

REPAIR CENTRES

UNITED KINGDOM

NORTH

AST Sheldon
Unit 1 Grovewood Bus
Centre
Strathclyde Business Park,
Bellshill
ML4 3NG
Tel: 01698 849987

Yorkshire Pneumatic
Services Ltd
Newhaven Business Park
Lowergate, Milnsbridge
Huddersfield
HD3 4HS
Tel: 01484 642211

Airtool Services
Zenith House
Off Aqueduct Street
Preston
Lancashire
PR1 7TB
Tel: 01772 557700

SOUTH

Ashford Garage Equipment
47-49 Whitfeld Road
Ashford
Kent
TN23 7TS
Tel: 01233 625279

E.N.W. Pneumatics
91 Fengate
Peterborough
Cambridgeshire
PE1 5BA
Tel: 01733 564875

PNH Pomphrey & Sons Ltd
92-98 Kingsland Road
St Phillips
Bristol
BS2 0QZ
Tel: 01179 556133

NORTHERN IRELAND

A.G. Air Limited
Central Park, Mallusk Road
Newtownabbey, Co Antrim
BT36 8FS
Northern Ireland
Tel: 02890 836008

MIDLANDS

R & A Airtool Services
Bathwalk Ind. Estate
George Street, Balsall
Heath
Birmingham
West Midlands, B12 9RH
Tel: 0121 440 6600

R.E.P. Air Services Ltd
Unit 23 Monarch Way
Belton Road Trading Estate
Loughborough
LE11 0XG
Tel: 01509 213452

Reading Pneumatic
Services
21a Star Road,
Caversham, Reading
Reading
RG4 5BE, Berkshire
Tel: 0118 947 4993

Forge Air Tool Services
Unit 7E, Beckingham
Business Pk
Beckingham St,
Tolleshunt Major, Maldon
Essex, CM9 8LZ
Tel: 01621 869597

D.E. Horn Pneumatic
Services
The Air Centre
Park Street
Ivybridge
Devon, PL21 9DW
Tel: 01752 893890





NOTES



LIMITED WARRANTY

Automotive Service Tool Products (“the Products”) of the Chicago Pneumatic Tool Company (“CP”) are warranted to be free from defects in material and workmanship for one year from the date of purchase.

This warranty applies only to Products purchased new from CP or its authorized dealers. Of course this warranty does not apply to Products which have been abused, modified, or repaired by someone other than CP or its Authorized Service Representatives.

If a CP Product proved defective in material or workmanship within one year after purchase, return it to any Authorized Service Center for CP tools, transportation prepaid, enclosing your name and address, adequate proof of date of purchase and a short description of the defect. CP will, at its option, repair or replace defective Products free of charge. Repairs or replacements are warranted as described above for the remainder of the original warranty period. CP’s sole liability and your exclusive remedy under this Warranty is limited to repair or replacement of the defective Product.

THE FOREGOING WARRANTY IS EXCLUSIVE AND IN LIEU OF ALL OTHER WARRANTIES, OR CONDITIONS, WRITTEN OR ORAL, EXPRESSED OR IMPLIED, INCLUDING, WITHOUT LIMITATION, ALL WARRANTIES, OR CONDITIONS, OR MERCHANTABILITY OR FITNESS FOR A PARTICULAR PURPOSE, ALL OF WHICH ARE HEREBY DISCLAIMED, THERE SHALL BE NO LIABILITY FOR INCIDENTAL, CONSEQUENTIAL OR SPECIAL DAMAGES, OR ANY OTHER DAMAGES, COSTS OR EXPENSES, EXCEPTING ONLY THE COST OR EXPENSE OF REPLACEMENT OR REPAIR.

Use only authorized parts. Any damage or malfunction caused by the use of unauthorized parts is not covered by Warranty.



www.cp.com



Please find your local contact at: www.cp.com

 Chicago
Pneumatic

 *Desoutter*

 GEORGES
RENAULT

 前哨
QIANSHAO

 SCANROTOR

 *techmotive*

English AL154982
Printed in England May 2005 Issue 1
© Copyright 2005
Chicago Pneumatic USA